


B14P42N5GB
STAINLESS STEEL



COOKING PASSION SINCE 1877



A

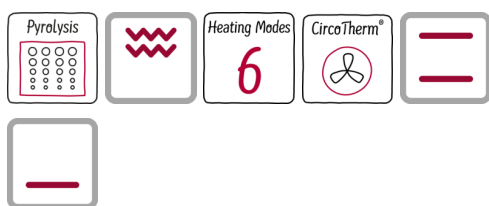

Built-in oven with CircoTherm® - Neff's award-winning hot air system

✓ CircoTherm® - Neff's outstanding hot-air system for simultaneous baking and roasting on up to 3 levels

Features

Technical Data

Color / Material Front : Stainless steel
Construction type : Built-in
Integrated Cleaning system : Pyrolytic
Required niche size for installation (HxWxD) : 575-597 x 560-568 x 550
Dimensions of the product (mm) : 595 x 595 x 550
Dimensions of the packed product (HxWxD) (mm) : 670 x 680 x 670
Control Panel Material : Glass
Door Material : Glass
Net weight (kg) : 38.6
Usable volume of cavity (l) : 63
Cooking method : Bottom heat, Conventional heat, Defrost, Full width grill, Hot Air, Thermo grill
First cavity material : Enamelled
Temperature control : electronic
Number of interior lights : 1
Approval certificates : CE, VDE
Length of electrical supply cord (cm) : 150
EAN code : 4242004201397
Number of cavities (2010/30/EC) : 1
Energy efficiency class (2010/30/EC) : A
Energy consumption per cycle conventional (2010/30/EC) : 0.92
Energy consumption per cycle forced air convection (2010/30/EC) : 0.82
Energy efficiency index (2010/30/EC) : 101.2
Electrical connection rating (W) : 3650
Current (A) : 16
Voltage (V) : 220-240
Frequency (Hz) : 50; 60
Plug type : no plug

Included accessories

1 x insert grid, 1 x combination grid cranked, 1 x universal pan, suit. pyrol. clean.

Optional accessories

Z1262X0 glasspan
Z1272X0 ACCESSORIES COOKER/OVEN
Z1332X0 Accessory
Z1342X0 Accessory
Z1343X0 Accessory
Z1512X0 Accessory



4 242004 201397

B14P42N5GB

STAINLESS STEEL

Features

Special features

- Drop down door

Features

- Silver display EasyClock
- Electronic control
- 1 x 40 Watt lamp
- Oven with 6 heating methods: CircoTherm®, Top/bottom heat, Full surface grill, Bottom heat, Defrost
- Pull out system: Available as an accessory
- 4 shelf positions
- Full glass inner door
- Quadruple glazed door
- TitanEnamel
- Cooling fan
- Pyrolytic cleaning
- Rapid heat
- Permanent control panel lock
- Automatic safety switch off
- Door lock during pyrolytic cleaning

Design

- Bevelled glass fascia
- Bevelled oval controls
- Retractable control
- Bar handle

Performance/technical information

- 65 litre capacity
- Energy efficiency rating A (0.89 kwh) than the standard value (0.99 kwh) for qualifying for energy class A
- Total connected load 3.65 KW
- Energy efficiency rating (acc. EU Nr. 65/2014):
Energy consumption per cycle in fan-forced convection mode:
0.82 kwh
Number of cavities: 1
Heat source: electrical
Cavity volume: 63 l

Standard accessories

- 1 x insert grid, 1 x combination grid cranked, 1 x universal pan, suit. pyrol. clean.