


N 90
B47FS34N0B
FULLSTEAM COMBINATION OVEN



COOKING PASSION SINCE 1877



A+

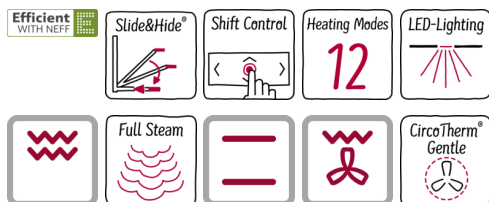

Built-in oven with FullSteam and SLIDE&HIDE® - combining all heating types and steam cooking in a single oven with unrestricted access

- ✓ Slide&Hide® - unrestricted access in the oven interior and easy handling due to rotating handle
- ✓ The new FullSteam® oven combines CircoTherm® oven and steam cooker in a single unit.
- ✓ EcoClean - the self-cleaning catalytic coating on the inside top and sides of the oven makes oven cleaning easier.
- ✓ BaseClean - the special cleaning programme for the oven floor.
- ✓ Shift Control - fast navigation through menus and simple operation with the generous TFT display.
- ✓ ComfortFlex® - the telescopic rails come out far enough to let you grasp the baking sheet conveniently from the sides.
- ✓ Modern LED lighting for bright, even illumination.

Features

Technical Data

Color / Material Front : Stainless steel
Construction type : Built-in
Door opening : Drop down
Required niche size for installation (HxWxD) : 585-595 x 560-568 x 550
Dimensions of the product (mm) : 595 x 596 x 548
Dimensions of the packed product (HxWxD) (mm) : 670 x 660 x 700
Control Panel Material : Stainless steel
Door Material : Glass
Net weight (kg) : 36.071
Approval certificates : CE, VDE
Length of electrical supply cord (cm) : 120
EAN code : 4242004181613
Current (A) : 16
Voltage (V) : 220-240
Frequency (Hz) : 60; 50
Plug type : no plug
Approval certificates : CE, VDE
Number of cavities (2010/30/EC) : 1
Usable volume (of cavity) - NEW (2010/30/EC) : 71
Energy efficiency class (2010/30/EC) : A+
Energy consumption per cycle conventional (2010/30/EC) : 0.87
Energy consumption per cycle forced air convection (2010/30/EC) : 0.69
Energy efficiency index (2010/30/EC) : 81.2

Optional accessories

Z11SZ80X0	SeamlessCombination 60 + 29cm
Z11SZ90X0	SeamlessCombination 60 + 45cm
Z12CB10A0	Baking tray, anthracite enamelled
Z12CM10A0	Moussaka pan, anthracite enamelled
Z12CQ10A0	Grill tray, anthracite enamelled
Z13TC10X0	ComfortFlex Rail (1 level) f. steam
Z1665X0	porcelain tray-GN1/3- unpunched
Z1685X0	porcelain tray-GN2/3- unpunched
Z18F60X0	Cookbook



4 242004 181613

N 90
B47FS34NOB
FULLSTEAM COMBINATION OVEN

Features

Design

- 4.1" TFT colour and graphics display with ShiftControl
- Illuminated Shift Control
- Cavity inner surface: Enamel anthracite
- Slide&Hide® with rotating handle

Features

- Control panel lock
 - Automatic safety switch off
 - Residual heat indicator
 - Start button
 - Door contact switch
- Temperature proposal
 - Actual temperature display
 - Heating up indicator
 - Sabbath setting
- Baking and roasting assistant, Automatic programmes
- LED light
- Water tank empty indicator
- Triple glazed door

Cleaning

- EcoClean Direct : side liners, back panel, ceiling
- EcoClean programme, Base Clean programme
- De-scaling programme
- Full glass inner door

Programmes/functions

- 12 heating methods: CircoTherm®, CircoTherm® Gentle, Top/bottom heat, Conventional heat Gentle, Hot air grilling, Full surface grill, Centre surface grill, CircoTherm® intensive, Bread baking, Bottom heat, Low temperature cooking, Keep warm
- Additional heating methods with steam: Steaming, Reheat, Dough proving, Defrost
- Additional functions:
 - De-scaling programme
 - Drying function
 - Automatic boiling point detection
- Number of automatic programmes: 30 PC
- Rapid heat
- Cooling fan

Accessories

- 1-level flexible telescopic rail, full extension, Stop function
- 1 x steam container, punched, size S, 1 x steam container, punched, size XL, 1 x steam container, unpunched, size S, 2 x grid, 1 x universal pan


Performance/technical information

- Energy efficiency rating (acc. EU Nr. 65/2014): A+
 - Energy consumption per cycle in conventional mode: 0.87 kwh
 - Energy consumption per cycle in fan-forced convection mode: 0.69 kwh
 - Number of cavities: Main cavity
 - Heat source: electrical
 - Cavity volume: 71 litre
- 1 l Water tank capacity
- Location of the steam generator is outside of the cavity
- Total connected load electric: 3.45 KW
- Temperature range 40 °C - 250 °C
- Length of mains cable: 120 cm
- Nominal voltage: 220 - 240 V
- Appliance dimension (h x w x d): 595 mm x 596 mm x 548 mm
- Niche dimension (h x w x d): 585 mm - 595 mm x 560 mm - 568 mm x 550 mm
- Please refer to the dimensions provided in the installation manual

N 90
B47FS34NOB
FULLSTEAM COMBINATION OVEN

Dimensioned drawings

Installation with a hob.

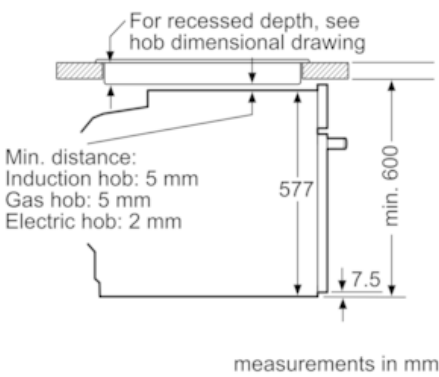

If the appliance will be installed underneath
a hob, the following worktop thicknesses
(including substructure if necessary)
must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	37 mm	38 mm
Full surface Induction hob	47 mm	48 mm
Gas hob	30 mm	38 mm
Electric hob	27 mm	30 mm

