


N 90
B48FT78N1B
FULLSTEAM COMBINATION OVEN



COOKING PASSION SINCE 1877



A+

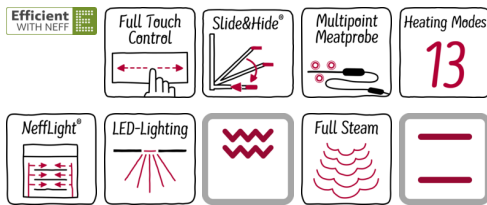

Built-in oven with FullSteam and SLIDE&HIDE® - combining all heating types and steam cooking in a single oven with unrestricted access

- ✓ Slide&Hide® - unrestricted access in the oven interior and easy handling due to rotating handle
- ✓ The new FullSteam® oven combines CircoTherm® oven and steam cooker in a single unit.
- ✓ Sous-vide - prepare vacuum-sealed dishes with FullSteam for a new horizon of flavour.
- ✓ FullTouch Control - simple, precise oven control by fingertip touch on the smooth surface of the high resolution TFT colour display.
- ✓ NeffLight® - perfect illumination of all four oven levels, even with the door shut.
- ✓
- ✓ ComfortFlex® - the telescoping rails come out far enough to let you grasp the baking sheet conveniently from the sides.
- ✓
- ✓ The Multi Point® roast thermometer helps the oven regulate the temperature and automatically adjust the cooking time.

Features

Technical Data

Color / Material Front : Stainless steel

Construction type : Built-in

Door opening : Drop down

Required niche size for installation (HxWxD) : 585-595 x 560-568 x 550

Dimensions of the product (mm) : 595 x 596 x 548

Dimensions of the packed product (HxWxD) (mm) : 670 x 650 x 690

Control Panel Material : Stainless steel

Door Material : Glass

Net weight (kg) : 43.7

Approval certificates : CE, VDE

Length of electrical supply cord (cm) : 120

EAN code : 4242004214113

Current (A) : 16

Voltage (V) : 220-240

Frequency (Hz) : 50; 60

Plug type : no plug

Approval certificates : CE, VDE

Number of cavities (2010/30/EC) : 1

Usable volume (of cavity) - NEW (2010/30/EC) : 71

Energy efficiency class (2010/30/EC) : A+

Energy consumption per cycle conventional (2010/30/EC) : 0.87

Energy consumption per cycle forced air convection (2010/30/EC) : 0.69

Energy efficiency index (2010/30/EC) : 81.2

Optional accessories

Z11SZ80X0	SeamlessCombination 60 + 29cm
Z11SZ90X0	SeamlessCombination 60 + 45cm
Z13CX62X0	Vacuum bags 180 x 280 mm, 100 pcs.
Z13CX64X0	Vacuum bags 240 x 350 mm, 100 pcs.
Z1665X0	porcelain tray-GN1/3- unpunched
Z1685X0	porcelain tray-GN2/3- unpunched
Z18F60X0	Cookbook



4 242004 214113

N 90
B48FT78N1B
FULLSTEAM COMBINATION OVEN

Features

Design

- 5.7" TFT colour and graphics display with FullTouch control
- Touch control
- Cavity inner surface: Enamel anthracite
- Slide&Hide® with rotating handle

Features

- Control panel lock
 - Automatic safety switch off
 - Residual heat indicator
 - Start button
 - Door contact switch
- Temperature proposal
 - Actual temperature display
 - Heating up indicator
 - Sabbath setting
- MultiPoint MeatProbe
- Baking and roasting assistant, Automatic programmes
- NeffLight (2 x 20 Watt halogen lamps) , LED light
- Water tank empty indicator
- Triple glazed door

Cleaning

- EcoClean Direct : back panel, ceiling, side liners
- EcoClean programme, Base Clean programme
- De-scaling programme
- Full glass inner door

Programmes/functions

- 13 heating methods: CircoTherm®, CircoTherm® Gentle, Top/bottom heat, Conventional heat Gentle, Hot air grilling, Full surface grill, Centre surface grill, CircoTherm® intensive , Bread baking, Bottom heat, Low temperature cooking, Plate warming, Keep warm
- Additional heating methods with steam: Steaming, Reheat, Dough proving, Defrost
- Additional functions:
 - De-scaling programme
 - Drying function
 - Automatic boiling point detection
- Number of automatic programmes: 30 PC
- Rapid heat
- Cooling fan

Accessories

- 1-level flexible telescopic rail, full extension, Stop function
- 1 x steam container, punched, size S, 1 x steam container, punched, size XL, 1 x steam container, unpunched, size S, 2 x grid, 1 x sponge, 1 x universal pan


Performance/technical information

- Energy efficiency rating (acc. EU Nr. 65/2014): A+
 - Energy consumption per cycle in conventional mode: 0.87 kwh
 - Energy consumption per cycle in fan-forced convection mode: 0.69 kwh
 - Number of cavities: Main cavity
 - Heat source: electrical
 - Cavity volume: 71 litre
- 1 l Water tank capacity
- Location of the steam generator is outside of the cavity
- Total connected load electric: 3.45 KW
- Temperature range 40 °C - 250 °C
- Length of mains cable: 120 cm
- Nominal voltage: 220 - 240 V
- Appliance dimension (h x w x d): 595 mm x 596 mm x 548 mm
- Niche dimension (h x w x d): 585 mm - 595 mm x 560 mm - 568 mm x 550 mm
- Please refer to the dimensions provided in the installation manual

N 90
B48FT78N1B
FULLSTEAM COMBINATION OVEN

Dimensioned drawings


Installation with a hob.

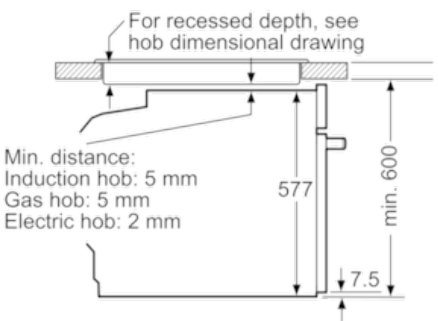


measurements in mm

If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	37 mm	38 mm
Full surface Induction hob	47 mm	48 mm
Gas hob	30 mm	38 mm
Electric hob	27 mm	30 mm

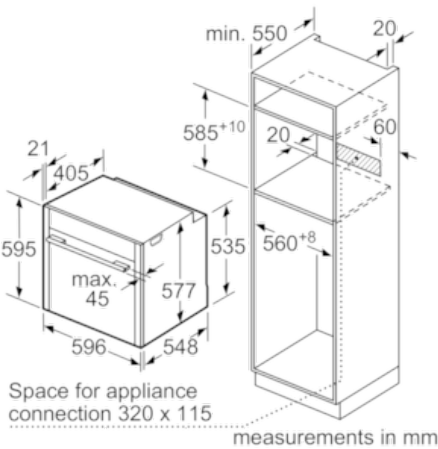

measurements in mm

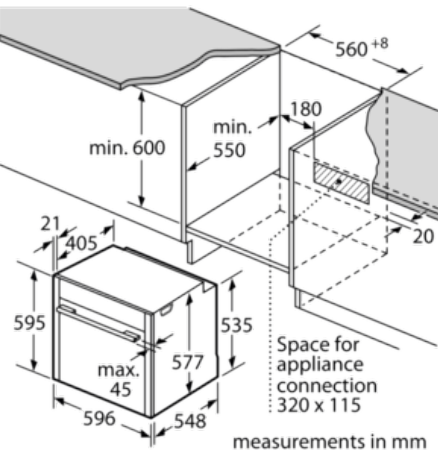

measurements in mm