


N 90  
B57CS24N0B  
OVEN  
STAINLESS STEEL



COOKING PASSION SINCE 1877



A

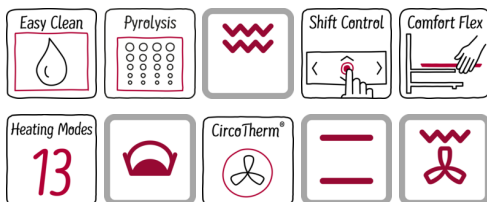

#### Included accessories

2 x combination grid, 1 x universal pan

#### Optional accessories

Z11SZ80X0 SeamlessCombination 60 + 29cm  
Z11SZ90X0 SeamlessCombination 60 + 45cm  
Z18C60X0 Cookbook

Built-in oven with SLIDE&HIDE® - unrestricted access to the oven interior

- ✓ Slide&Hide® - unrestricted access in the oven interior and easy handling due to rotating handle
- ✓ CircoTherm® - the unique hot air-system for simultaneous baking and roasting on up to 3 levels
- ✓ Dual cleaning options:
- ✓ Pyrolytic following heavy use - just let the oven interior clean itself.
- ✓ EasyClean® - the quick and easy option for day to day maintenance.
- ✓ Shift Control - fast navigation through menus and simple operation with the generous TFT display.
- ✓ ComfortFlex® - the telescopic rails come out far enough to let you grasp the baking sheet conveniently from the sides.

#### Features

##### Technical Data

Color / Material Front : Stainless steel

Construction type : Built-in

Integrated Cleaning system : Hydrolytic, Pyrolytic

Required niche size for installation (HxWxD) : 585-595 x 560-568 x 550

Dimensions of the product (mm) : 595 x 596 x 548

Dimensions of the packed product (HxWxD) (mm) : 675 x 690 x 660

Control Panel Material : Stainless steel

Door Material : Glass

Net weight (kg) : 36.4

Usable volume of cavity (l) : 71

Cooking method : , Bottom heat, Bread Baking Setting, Conventional heat, Defrost, Dough proving setting, Full width grill, Half width grill, Hot Air, Hot Air-Eco, Hot air grilling, low temperature cooking, Pizza setting

First cavity material : Enamelled

Temperature control : electronic

Number of interior lights : 1

Approval certificates : CE, VDE

Length of electrical supply cord (cm) : 120

EAN code : 4242004181934

Number of cavities (2010/30/EC) : 1

Energy efficiency class (2010/30/EC) : A

Energy consumption per cycle conventional (2010/30/EC) : 0.90

Energy consumption per cycle forced air convection (2010/30/EC) : 0.74

Energy efficiency index (2010/30/EC) : 87.1

Electrical connection rating (W) : 3450

Current (A) : 16

Voltage (V) : 220-240

Frequency (Hz) : 60; 50

Plug type : no plug



4 242004 181934

N 90  
B57CS24NOB  
OVEN  
STAINLESS STEEL

## Features

### Design

- 4.1" TFT colour and graphics display with ShiftControl
- Illuminated Shift Control
- Slide&Hide® with rotating handle

### Features

- Temperature proposal  
Actual temperature display  
Heating up indicator  
Sabbath setting
- Control panel lock  
Automatic safety switch off  
Residual heat indicator  
Start button  
Door contact switch
- Baking and roasting assistant
- Interior halogen light
- Quadruple glazed door
- 1-level flexible telescopic rail, full extension, Stop function
- Cavity inner surface: Enamel anthracite

### Cleaning

- Pyrolytic cleaning
- EasyClean
- Full glass inner door

### Programmes/functions

- Oven with 13 heating methods: CircoTherm®, CircoTherm® Eco, Top/bottom heat, Conventional heat eco, Hot air grilling, Full surface grill, Centre surface grill, CircoTherm® intensive, Bread baking, Bottom heat, Low temperature cooking, Defrost, Dough proving
- Rapid heat
- Cooling fan
- Info button

### Standard accessories

- 1-level flexible telescopic rail, full extension, Stop function
- 2 x combination grid, 1 x universal pan


### Technical information

- Energy efficiency rating (acc. EU Nr. 65/2014): A  
Energy consumption per cycle in fan-forced convection mode: 0.74 kWh  
Number of cavities: 1  
Heat source: electrical  
Cavity volume: 71 litre
- Temperature range 40 °C - 275 °C
- Length of mains cable: 120 cm
- Total connected load electric: 3.45 KW
- Appliance dimension (hwxwd): 595 mm x 596 mm x 548 mm
- Niche dimension (hwxwd): 585 mm - 595 mm x 560 mm - 568 mm x 550 mm
- Please refer to the dimensions provided in the installation manual

N 90  
B57CS24NOB  
OVEN  
STAINLESS STEEL

Dimensioned drawings


Installation with a hob.

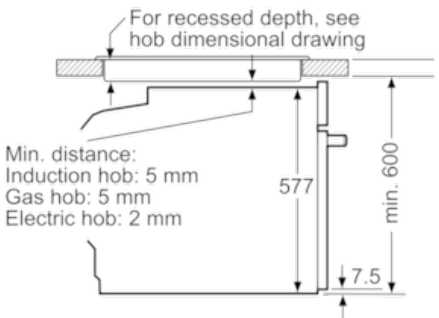


measurements in mm

If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	37 mm	38 mm
Full surface Induction hob	47 mm	48 mm
Gas hob	30 mm	38 mm
Electric hob	27 mm	30 mm

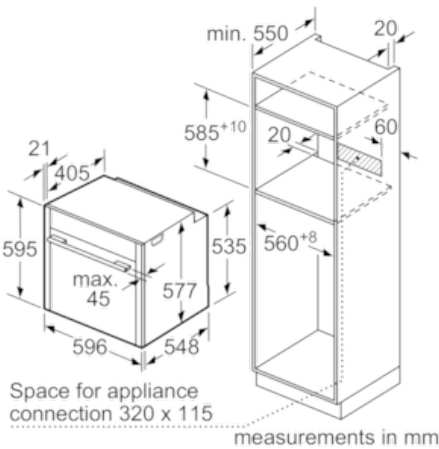

measurements in mm

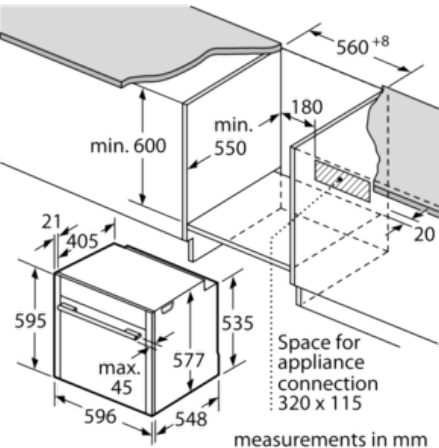

measurements in mm