

N 70
C17DR02N0B
COMPACT STEAMER



COOKING PASSION SINCE 1877



Compact built-in steam cooker - delicious Compact built-in steam cooker - delicious flavour and healthy nutrition

- ✓ Steam cooking with Neff - delicious enjoyment and healthy nutrition.
- ✓ Shift Control - fast navigation through menus and simple operation with the TFT display.
- ✓ Hinged door with cushioned opening and closing.

Features

Technical Data

Color / Material Front : Stainless steel
Construction type : Built-in
Required niche size for installation (HxWxD) : 450-455 x 560-568 x 550
Dimensions of the product (mm) : 455 x 596 x 548
Dimensions of the packed product (HxWxD) (mm) : 520 x 650 x 710
Control Panel Material : Stainless steel
Door Material : Glass
Net weight (kg) : 24.6
Approval certificates : CE, VDE
Length of electrical supply cord (cm) : 150
EAN code : 4242004202318
Current (A) : 10
Voltage (V) : 220-240
Frequency (Hz) : 60; 50
Plug type : GB plug
Approval certificates : CE, VDE



4 242004 202318

Optional accessories

Z11SZ60X0	SeamlessCombination 45 + 14cm
Z11SZ90X0	SeamlessCombination 60 + 45cm
Z1665X0	porcelain tray-GN1/3- unpunched
Z1685X0	porcelain tray-GN2/3- unpunched
Z18D45X0	Cookbook

N 70
C17DR02NOB
COMPACT STEAMER

Features

Design

- 2.5" TFT colour display
- Illuminated Shift Control
- electronic clock
- Drop down door, SoftClose, soft opening
- Bar handle
- Cavity inner surface: Stainless steel

Features

- Control panel lock
Automatic safety switch off
Start button
Door contact switch
- Temperature proposal
Actual temperature display
Heating up indicator
- automatic programmes: 20
- Interior light
- 4 shelf positions
- Cooling fan

Cleaning

- Full glass inner door

Programmes/functions

- Compact steamer with 4 heating methods: Steaming, Reheat, Dough proving, Defrost
- Additional functions:
De-scaling programme
Automatic boiling point detection
- automatic programmes: 20

Standard accessories


- 1 x steam container, punched, size L, 1 x steam container, unpunched, size L, 1 x sponge

Technical information


- Cavity volume: 38 l
- Temperature range 30 °C - 100 °C
- 1.3 l Water tank capacity
- Water tank empty indicator
- Steam generator inside the cavity
- Length of mains cable: 150 cm
- Total connected load electric: 1.75 KW
- Nominal voltage: 220 - 240 V
- Appliance dimension (hwxwd): 455 mm x 596 mm x 548 mm
- Niche dimension (hwxwd): 455 mm - 455 mm x 560 mm - 568 mm x 550 mm
- Please refer to the dimensions provided in the installation manual

N 70
C17DR02NOB
COMPACT STEAMER

Dimensioned drawings

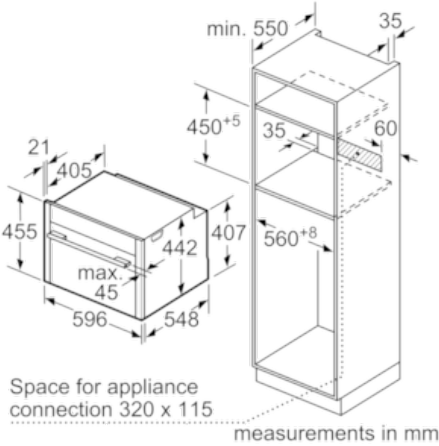

Installation with a hob.

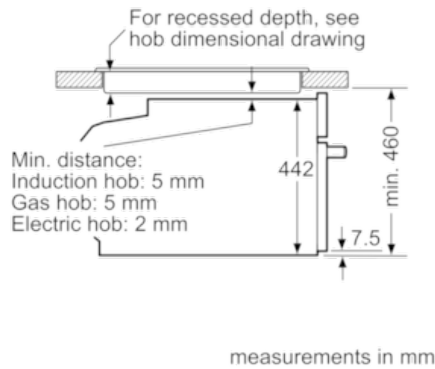

If the compact appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	42 mm	43 mm
Full surface Induction hob	52 mm	53 mm
Gas hob	32 mm	43 mm
Electric hob	32 mm	35 mm