


N 90
COMPACT OVEN
C28CT26N0B
STAINLESS STEEL



COOKING PASSION SINCE 1877



A+

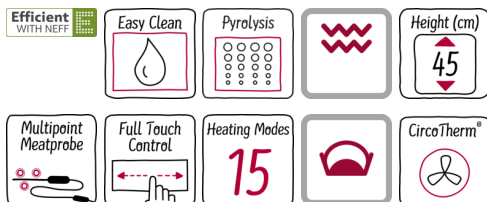

Compact built-in oven with CircoTherm® - Neff's award-winning hot air system

- ✓ CircoTherm® - the unique hot air-system for simultaneous baking and roasting on up to 3 levels
- ✓ Dual cleaning options:
- ✓ Pyrolytic following heavy use - just let the oven interior clean itself.
- ✓ EasyClean® - the quick and easy option for day to day maintenance.
- ✓ FullTouch Control - simple, precise oven control by fingertip touch on the smooth surface of the high resolution TFT colour display.
- ✓ Modern LED lighting for bright, even illumination.
- ✓ The Multi Point® roast thermometer helps the oven regulate the temperature and automatically adjust the cooking time.
- ✓ Hinged door with cushioned opening and closing.

Features

Technical Data

Color / Material Front : Stainless steel

Construction type : Built-in

Integrated Cleaning system : Hydrolytic, Pyrolytic

Required niche size for installation (HxWxD) : 450-455 x 560-568 x 550

Dimensions of the product (mm) : 455 x 596 x 548

Dimensions of the packed product (HxWxD) (mm) : 520 x 710 x 650

Control Panel Material : Stainless steel

Door Material : Glass

Net weight (kg) : 32.5

Usable volume of cavity (l) : 47

Cooking method : , Bottom heat, Bread Baking Setting, Conventional heat, Defrost, Dough proving setting, Full width grill, Half width grill, Hot Air, Hot Air-Eco, Hot air grilling, low temperature cooking, Pizza setting, pre-heating, warming

First cavity material : Enamelled

Temperature control : electronic

Number of interior lights : 1

Approval certificates : CE, VDE

Length of electrical supply cord (cm) : 150

EAN code : 4242004185246

Number of cavities (2010/30/EC) : 1

Energy efficiency class (2010/30/EC) : A+

Energy consumption per cycle conventional (2010/30/EC) : 0.73

Energy consumption per cycle forced air convection (2010/30/EC) : 0.61

Energy efficiency index (2010/30/EC) : 81.3

Electrical connection rating (W) : 2990

Current (A) : 13

Voltage (V) : 220-240

Frequency (Hz) : 60; 50

Plug type : no plug

Included accessories

1 x enamel baking tray, 1 x combination grid, 1 x universal pan

Optional accessories

Z11SZ60X0 SeamlessCombination 45 + 14cm

Z11SZ90X0 SeamlessCombination 60 + 45cm

Z18C60X0 Cookbook



4 242004 185246

N 90
COMPACT OVEN
C28CT26N0B
STAINLESS STEEL

Features

Design

- 5.7" TFT colour and graphics display with FullTouch control
- Touch control
- Bar handle

Features

- Temperature proposal
Actual temperature display
Heating up indicator
Sabbath setting
- Control panel lock
Automatic safety switch off
Residual heat indicator
Start button
Door contact switch
- Baking and roasting assistant
- MultiPoint MeatProbe
- Drop down door, SoftClose, soft opening
- LED light
- Cooling fan
- Cavity inner surface: Enamel anthracite

Cleaning

- Pyrolytic cleaning
- EasyClean
- Full glass inner door

Programmes/functions

- Rapid heat
- Compact oven with 15 heating methods: CircoTherm®, CircoTherm® Eco, Top/bottom heat, Conventional heat eco, Hot air grilling, Full surface grill, Centre surface grill, CircoTherm® intensive, Bread baking, Bottom heat, Low temperature cooking, Defrost, Dough proving, Plate warming, Keep warm
- Info button

Standard accessories


- 1 x enamel baking tray, 1 x combination grid, 1 x universal pan

Technical information


- Energy efficiency rating (acc. EU Nr. 65/2014): A+
Energy consumption per cycle in conventional mode: 81.3
Energy consumption per cycle in fan-forced convection mode: 0.61 kwh
Number of cavities: 1
Cavity volume: 47 litre
- Temperature range 40 °C - 200 °C
- Length of mains cable: 150 cm
- Total connected load electric: 2.99 KW
- Appliance dimension (hxwxh): 455 mm x 596 mm x 548 mm
- Niche dimension (hxwxh): 450 mm - 455 mm x 560 mm - 568 mm x 550 mm
- Please refer to the dimensions provided in the installation manual

N 90
COMPACT OVEN
C28CT26N0B
STAINLESS STEEL

Dimensioned drawings

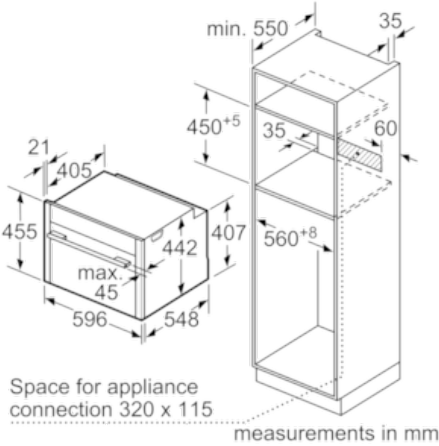

Installation with a hob.

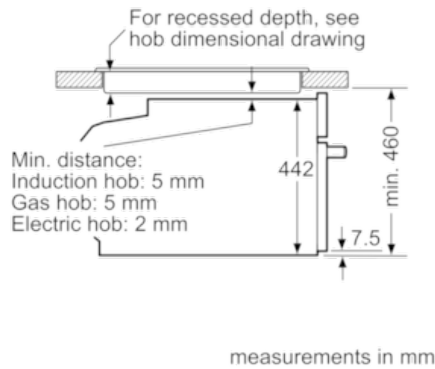

If the compact appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	42 mm	43 mm
Full surface Induction hob	52 mm	53 mm
Gas hob	32 mm	43 mm
Electric hob	32 mm	35 mm