

Freestanding Bath/Shower Mixer

Installation and Maintenance Instructions


REMOVING OLD TAPS OR MIXER

- 1 A "Tap Spanner" may be required This can be purchased in store
- 2 Ensure mains water supply is turned off at the stopcock or service valves.
- 3 After disconnecting the water supply, drain the pipework
- 4 Unscrew the nuts connecting the water pipes to the fittings
- 5 Be careful to save and inspect the fibre washer between the base of the tap tails and the water pipe.

FITTING YOUR NEW MIXER

Fitting your new mixer is easy when you follow these simple step-by-step instructions.

1. Identify all components.

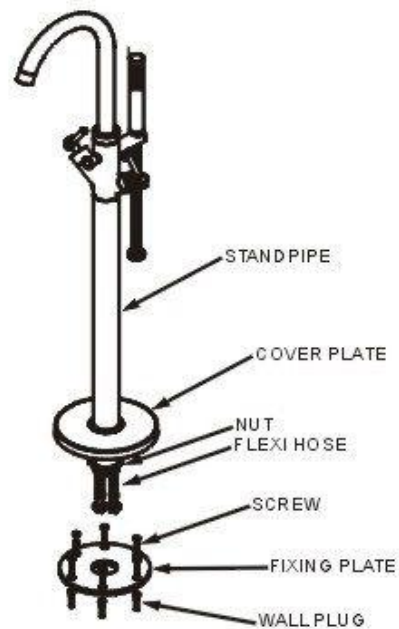

2. Prior to installation, flush out pipework to remove debris.
3. Turn off water supply
4. Place fixing plate on the floor in required position and mark hole locations
5. Drill six holes in the floor and place the wallplugs into the holes.
6. Connect the flexi hoses to the hot & cold water supply and then match the holes
7. Ensure taps are in the off position
8. Turn on water supply and check for leaks around the hoses
9. Line the fixing plate up with the six wallplugs with the tap in the correct position
10. Tighten the six screws until standpipe is held secure
11. Tighten the NUT to secure onto fixing plate
12. Slide coverplate down over fixing plate
13. Test the tap for leaks
14. Installed

AFTERCARE INSTRUCTIONS

Whilst modern plating techniques are used in the manufacture of this it his, the surfaces will wear if cleaned incorrectly. Clean this product with a soft cloth and clean water. The use of any abrasive material will invalidate the guarantee.