


The Narrowest Bezel LG Video Wall

55" SUPER-NARROW 3.5mm BEZEL PREMIUM DISPLAY LV75A/77A

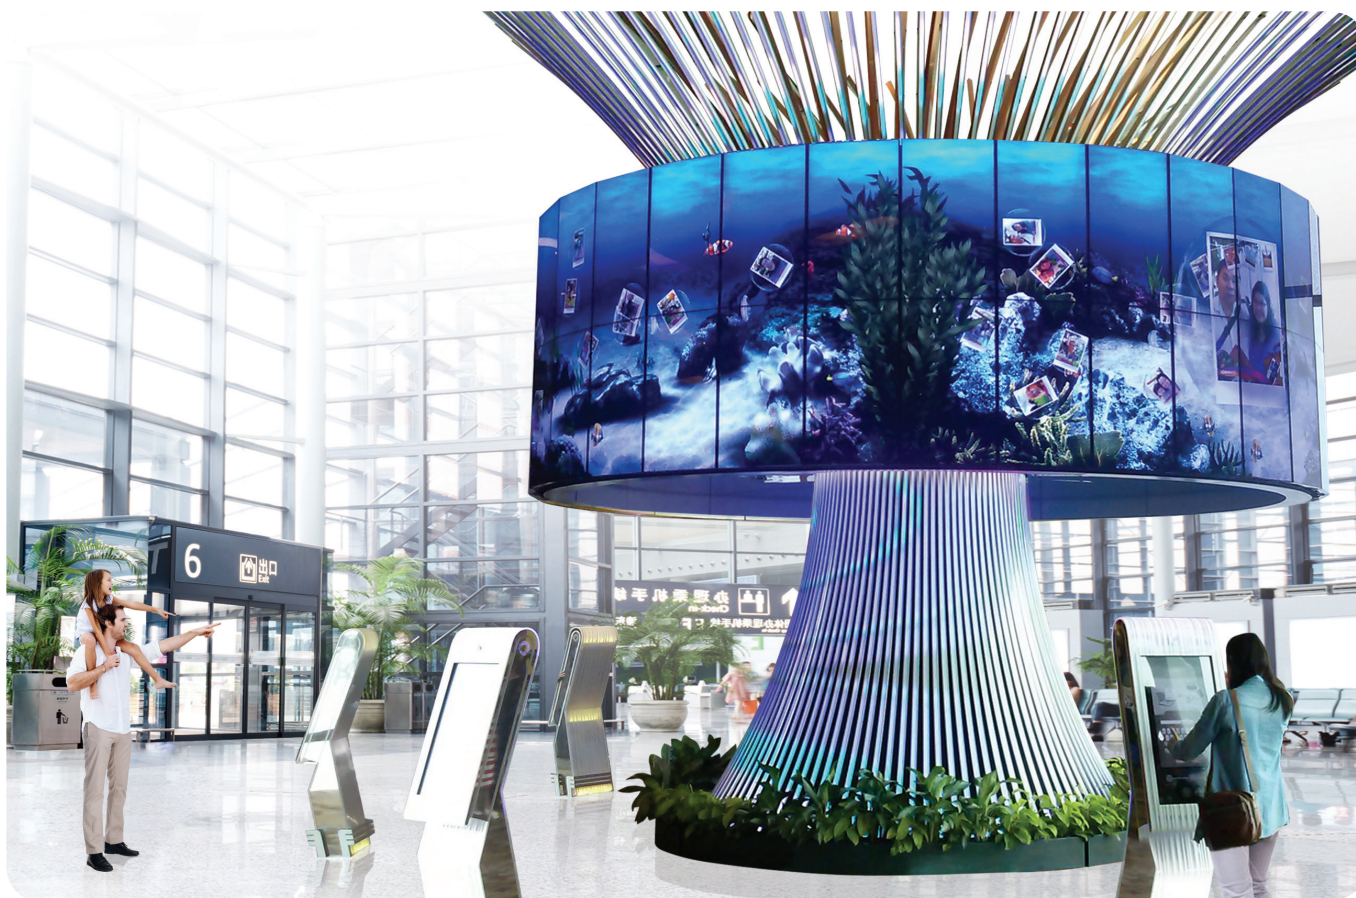

The Narrowest Bezel of LG Video Wall Display

Bezel width of 4.9mm in 47" and 3.5mm in 55" Super-Narrow Bezel display creates visually stunning video wall that is easily installed, maintained and managed.

55LV77A / 55LV75A




Active to Active
3.8mm
Bezel to Bezel
3.5mm

2.25mm(Left/Top) / 1.25mm(Right/Bottom)


SuperSign V Content management S/W

Flexible content editing in various layouts including regular matrix and non-formal irregular video-wall is possible to your preference in a timely and cost effective manner without unnecessary expensive video wall console.

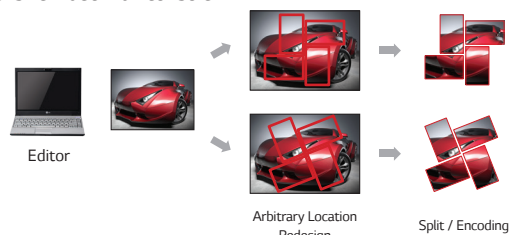


DisplayPort 1.2 Daisy-Chain

Display of super high resolution UHD content in Video wall through DP 1.2 daisy chain.

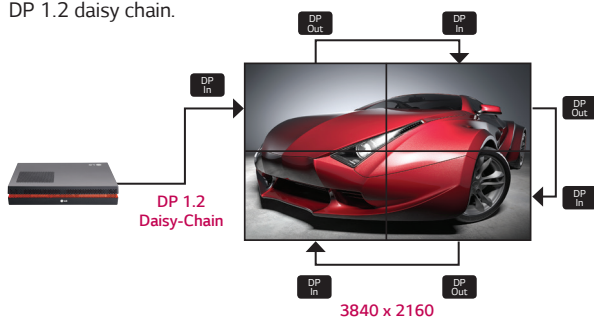

TruMotion™ 's 60Hz refresh rate

TruMotion's 60Hz refresh rate reduces motion blur and judder, as a result, ensures customer to enjoy clean video content.

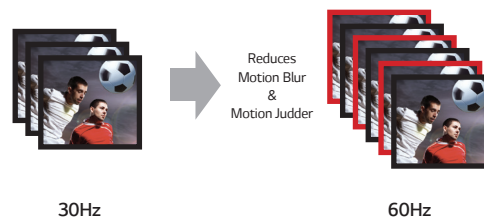

THE NARROWEST BEZEL LG VIDEO WALL

LV77A/LV75A 55"

* LV77A launches on March, 2014



FEATURES

- Bezel to bezel : 3.5mm
- Brightness : 700nits (LV77A), 500nits (LV75A)
- Weight : 23kg
- Depth: 89mm

SPECIFICATIONS

55LV75A/55LV77A

PANEL	Screen Size	55" (54.64" measured diagonal)
	Panel Technology	IPS
	Aspect Ratio	16 : 9
	Native Resolution	1,920 x 1,080 (FHD)
	Brightness	500cd / m ² (LV75A), 700cd / m ² (LV77A)
	Contrast Ratio	1,400 : 1
	Dynamic CR	500,000 : 1
	Viewing Angle (H x V)	178 x 178
	Response Time	12ms (G to G)
	Input	
CONNECTIVITY	Digital	DVI-D(1), HDMI(1), Display Port(1) with HDCP for all input
	Analog	RGB(1), Shared Component(1), AV (1)
	Audio	PC Audio In (1)
	External Control	RS232C (1), RJ45 (1), IR Receiver (1)
	USB	USB (1)
	Output	
	Digital	Display Port (1)
	Analog	RGB(1)
	Audio	Audio Out (1)
	External Control	RS232C (1)
	Audio	
	Auto Volume	No
	Balance	No
	Audio Power	No
	Speaker On/off	No
	Clear Voice II	No
	Sound mode	No

PHYSICAL SPECIFICATION	Bezel Width	2.25mm (L/T) / 1.25mm (R/B)
	Monitor Dimension (W x H x D)	1213.4mm x 684.2mm x 88.5mm
	Weight (head)	23kg
	Carton Dimensions (W x H x D)	1353mm x 850mm x 255mm
	Packed Weight	30kg
SPECIAL FEATURES	VESA™ Standard Mount Interface	600mm x 400mm
	Additional	Smart Energy Saving, Temp Sensor, Up to 15x15 Tile Mode, USB Playback
ENVIRONMENT CONDITIONS	Operation Temperature	0°C ~ 40°C
	Operation Humidity	10% ~ 80%
POWER	Power Supply	100-240V~, 50/60Hz
	Power Consumption	
	Typical / Smart Energy Saving	160W(Typ) / 90W(SES)
	DPMS	0.7W
STANDARD (CERTIFICATION)	Power Off	0.5W
	Safety	UL / cUL / CB / TUV / KC
	EMC	FCC Class "B" / CE / KCC
	ErP / Energy Star	Yes / Yes (Energy Star 6.0)
MEDIA PLAYER COMPATIBILITY	Slot PC Compatible (optional)	No
	External Media player Attachable	Yes
SOFTWARE COMPATIBILITY	SuperSign Elite-w lite / Elite-c	Yes / Yes
ACCESSORY	Included	
		Remote Controller, Power Cable, DP Cable, Manual, IR Receiver, RS-232C Cable, Tiling Guide, Screw

* Image may differ slightly from actual product. Specifications are subject to change without prior notice.

DIMENSION (unit : mm)

