


# NEC MultiSync® V552-TM (Multi-Touch)

Order Code: 60003678

NEC LCD 55" Touch Large Format Display

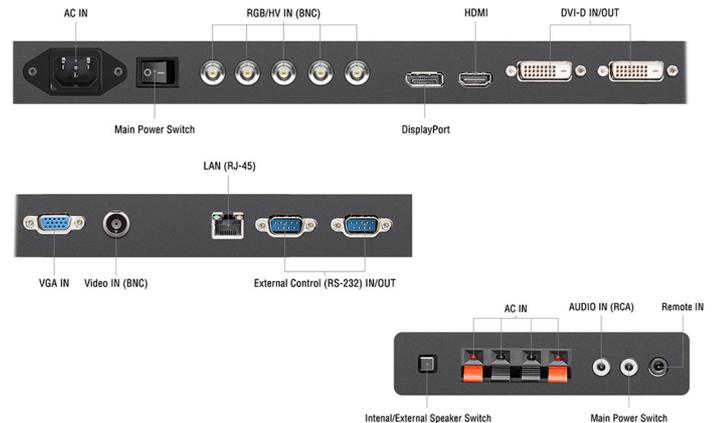

NEC MultiSync® V552-TM is the new multi-touch product of NEC's V Series boasting 55" in size and delivering true multitouch support with up to 6 simultaneous touch points. Thanks to a unique anti reflective coating, reflections are reduced to a minimum which significantly increases the readability of the content shown. The OPS option slot for e.g. a slot-in PC helps to save space and does away with any cables including the USB cable external PC solutions may need.

V552-TM is ideal for retail signage, way finding, conference room and education applications delivering short response times and a high level of accuracy.

## BENEFITS

**Multi-Touch** - true multi-touch support with up to 6 simultaneous touch points, gesture control for Windows 7/8, Mac and Linux driver support.

**Infrared Touch** - offering quick touch response and perfect usability.

**Driver-free** - no need to install any drivers on the host PC for all major operating systems. Interface to host PC is USB HID protocol with no drivers, calibration or application software on the host.

**Calibration-free** - due to robust and accurate design, no drift, mechanical alignment or temperature issues. No re-calibration of the touch system necessary.

**Comprehensive Touch Usage** - possible usage with Finger, Stylus and Gloves.


**Protective Glass** - single anti-reflection coating for perfect visibility, premium toughened glass for security.

**Future Ready with OPS Cable Free Expansion** - upgrade the power of your display at any time without the need for external cables or devices.

**Free DisplayNote Multiuser Licence** - present, share, collaborate with up to 5 participants across multiple devices (available until May 2015).



NaViSet  
Administrator 2



<b>DISPLAY</b>	Panel Technology	AMVA3 with Edge LED backlights	
	Active Screen Area (W x H) [mm]	1,209.6 x 680.4	
	Screen Size [inch/cm]	54.5 / 138.8	
	Aspect Ratio	16:9	
	Brightness (shipping) [cd/m <sup>2</sup> ]	320, (450 max)	
	Contrast Ratio (typ.)	4000:1	
	Viewing Angle [°]	178 horizontal / 178 vertical (typ. at contrast ratio 10:1)	
	Response Time (typ.) [ms]	6.5 (grey-to-grey)	
Panel Refresh Rate [Hz]	60		
<b>SYNCHRONISATION RATE</b>	Horizontal Frequency [kHz]	31.5 - 91.1 (analog and digital)	
	Vertical Frequency [Hz]	25.2 - 85	
<b>RESOLUTION</b>	Native Resolution	1920 x 1080 at 60 Hz	
	Supported on digital and analogue inputs (PC)	1920 x 1080; 1680 x 1050; 1600 x 1200; 1400 x 1050; 1366 x 786; 1280 x 1024; 1280 x 960; 1280 x 800; 1280 x 768; 1280 x 720; 1140 x 900; 1024 x 768; 800 x 600; 720 x 576; 720 x 480; 720 x 400; 640 x 480	
	Supported on digital inputs (Video)	1920 x 1080i (59.94/60)16:9; 1920 x 1080p (59.94/60)16:9; 1920 x 1080p (50)16:9; 1920 x 1080p (23.97/24)16:9; 1920 x 1080p (25)16:9; 1920 x 1080p (29.97/30)16:9; 1280 x 720p (50)16:9; 720 x 576p (50)16:9; 720 x 480p (59.94/60)16:9	
<b>CONNECTIVITY</b>	Input Video Analogue	1 x D-sub 15 pin; Composite (BNC); RGBHV for PC and Component/Composite (BNC)	
	Input Video Digital	1 x DisplayPort; 1 x DVI-D (with HDCP); 1 x HDMI 1.3	
	Input Audio Analogue	1 x 3,5 mm jack	
	Input Audio Digital	1 x HDMI; DisplayPort	
	Input Control	LAN 100Mbit; remote control wire (3,5mm jack); RS232	
	Output Video Digital	1 x DVI-D	
	Output Audio Analogue	3,5mm jack	
	Output Control	RS232	
<b>OPTION SLOT</b>	Slot Technology	STV2 (compatible with Intel / NEC OPS standard)	
	Inrush Current [A]	max. 10	
	Power Consumption [W]	max. 61	
	Voltage / Current [V/A]	16/4	
	<b>ELECTRICAL</b>	Power Consumption on Mode [W]	100 shipping; 235 (max.)
		Power Savings Mode [W]	< 0.5 (ECO Standby); < 1
		Power Management	VESA DPMS
	<b>ENVIRONMENTAL CONDITIONS</b>	Operating Temperature [°C]	+0 to +40
Operating Humidity [%]		20 to 80	
Storage Humidity [%]		10 to 90	
Storage Temperature [°C]		-20 to +60	
<b>MECHANICAL</b>	Dimensions (W x H x D) [mm]	Without stand: 1,294.4 x 765.2 x 86.5	
	Weight [kg]	Without stand: 40.8	
	Bezel Width [mm]	41.4 (left and right); 41.4 (top and bottom)	
	VESA Mounting [mm]	300 x 300 (FDMI); 4 holes; M6	
<b>GLASS</b>	Thickness [mm]	4	
	Type	Double sided anti-reflection, fully tempered	
	Light Transmission [%]	96 (+/- 2 %)	
	Reflection Rate [%]	2	
<b>TOUCH</b>	Touch Technology	Infrared Touch	
	Number of Touches	Real multi-touch up to 6 touches	
	Response Time [ms]	0 to 20	
	Touch Method	Finger; Gloves; Stylus	
	Operating System	Native Multi-Touch (Windows7, Windows8); Single Touch (Windows XP, Windows Vista, Linux, MAC OS X, Android)	
	Accuracy [mm]	< 2	
	Touch Resolution	32767 x 32767	
<b>ADDITIONAL FEATURES</b>	Special Characteristics	Advanced fan control; Automatic Alarm E-Mails; Copy display settings through RS232; DICOM support; Hardware colour calibration possible; Input name adjustment; Matrix memory; NaViSet Administrator 2; OSD rotation for portrait mode; Scheduler; Screen saver functions; TileMatrix (10 x 10); User input priority definition; Various picture in picture options	
	Safety and Ergonomics	C-tick; CE; FCC Class B; PSB; RoHS; TÜV GS; UL/C-UL or CSA; VCCI	
	Plug and Play	VESA DDC2Bi	
	Audio	Integrated Speakers (10 W + 10 W); Optional Speakers (15 W + 15 W)	
	Shipping Content	Display; DVI-D cable; Free LAN control software (download); Power Cable; Remote Control; USB cable	
	Warranty	3 years warranty incl. backlight	
<b>AVAILABLE OPTIONS</b>	Accessories	Feet (ST-4620); Speaker (SP-RM1); Trolley (PDMHA, PDMHM-L); Wall mount (PDWHM-M, PDW S 32-55 L and P, PDW T L L and P)	
	OPS	HD-SDI 1.5, 3.5; HDBaseT receiver; Slot-inPC (Intel® Core i5/i7 with WS7P recommended); Wireless Display Media Player	
<b>GREEN FEATURES</b>	Energy Efficiency	Ambient light sensor; Carbon savings meter; ECOmode	
	Ecological Materials	Manuals on CD; Optional feet	