


N 50, Built-in oven, 60 cm, Stainless steel  
B6CCG7AN0B



COOKING PASSION SINCE 1877



A



Built-in Slide&Hide® oven with fixed handle - unrestricted access to the oven interior thanks to the fully retracting oven door

- ✓ Slide&Hide® with fixed handle - the fully retracting oven door.
- ✓ CircoTherm® - our smart hot-air solution for simultaneous baking and roasting on up to three levels
- ✓ Dual cleaning options: Pyrolytic cleaning programmes - just let the oven interior clean itself. EasyClean - the quick and easy option for day to day maintenance.
- ✓ LED-Display - simple, straightforward for clear reading

#### Features

##### Technical Data

Color / Material Front : Stainless steel  
Construction type : Built-in  
Integrated Cleaning system : Hydrolytic, Pyrolytic  
Required niche size for installation (HxWxD) : 585-595 x 560-568 x 550  
Dimensions : 595 x 594 x 548  
Dimensions of the packed product (HxWxD) (mm) : 660 x 690 x 660  
Control Panel Material : Stainless steel  
Door Material : Glass  
Net weight (kg) : 39.847  
Usable volume of cavity (l) : 71  
Cooking method : Bottom heat, Conventional heat, Full width grill, Hot Air, Hotair gentle, Hot air grilling, Pizza setting  
First cavity material : Other  
Temperature control : electronic  
Number of interior lights : 1  
Approval certificates : CE, VDE  
Length of electrical supply cord (cm) : 120  
EAN code : 4242004248682  
Number of cavities (2010/30/EC) : 1  
Energy efficiency rating : A  
Energy consumption per cycle conventional (2010/30/EC) : 1.04  
Energy consumption per cycle forced air convection (2010/30/EC) : 0.81  
Energy efficiency index (2010/30/EC) : 95.3  
Connection rating (W) : 2990  
Current (A) : 13  
Voltage (V) : 220-240  
Frequency (Hz) : 50; 60  
Plug type : no plug

#### Optional accessories

Z11AB15A0 Baking tray, non-stick ceramic coated  
Z11CB10E0 Baking tray, grey enamelled  
Z11CR10X0 Baking and roasting grid (standard)  
Z11GT10X3 Glass roasting dish, 5,4l  
Z11TF36X0  
Z11TI15X0 Cliprails  
Z1913X0 Baking Stone  
Z19DD10X0 Steam set for ovens



4 242004 248682

*N 50, Built-in oven, 60 cm, Stainless steel*  
*B6CCG7AN0B*



COOKING PASSION SINCE 1877

## Features

### Design

- LED-display control (red)
- Elongated designed dials, Retractable control dials, Bevelled oval controls
- Slide&Hide® with fixed handle
- Enamel grey
- 4 shelf positions

### Features

- Door lock during pyrolytic cleaning Control panel lock Automatic safety switch off
- Heating up indicator Automatic start
- Interior halogen light

### Cleaning

- Pyrolytic cleaning
- EasyClean
- Full glass inner door

### Programmes/functions

- Oven with 7 PC heating methods: CircoTherm®, Top/bottom heat, Circo-roasting, Full surface grill, CircoTherm® intensive, Bottom heat, CircoTherm® gentle
- Manual rapid heating up
- Temperature range 50 °C - 275 °C
- Bar handle
- Cooling fan




### Accessories

- 2 x combination grid, 1 x universal pan


### Performance/technical information

- Energy efficiency rating (acc. EU Nr. 65/2014): A Energy consumption per cycle in conventional mode: 1.04 kWh Energy consumption per cycle in fan-forced convection mode: 0.81 kWh Number of cavities: Main cavity Heat source: electrical Cavity volume: 71 litre
- Cavity volume: 71 litre
- Total connected load electric: 2.99 KW
- 120 cm Cable length
- Nominal voltage: 220 - 240 V
- Appliance dimension (hxxwx d): 595 mm x 594 mm x 548 mm
- Niche dimension (hxxwx d): 585 mm - 595 mm x 560 mm - 568 mm x 550 mm
- Please refer to the dimensions provided in the installation manual

## Dimensioned drawings

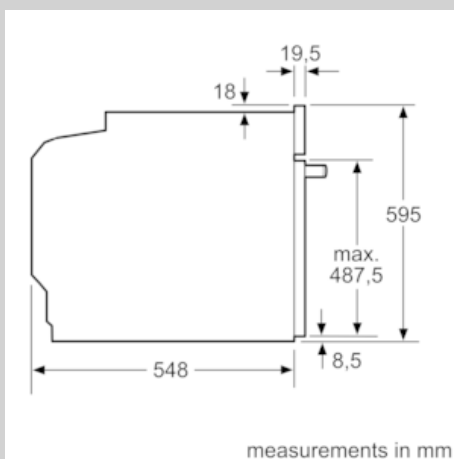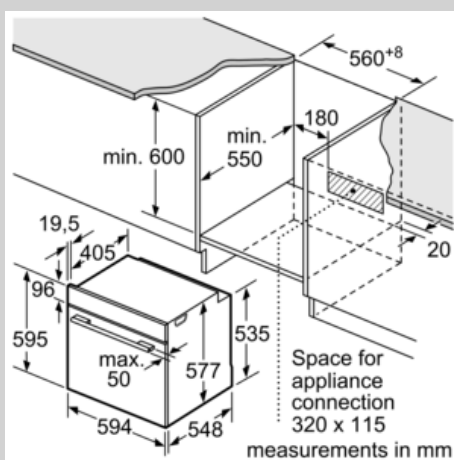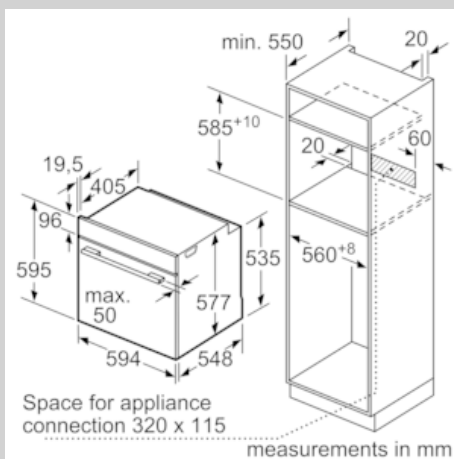

Installation with a hob.

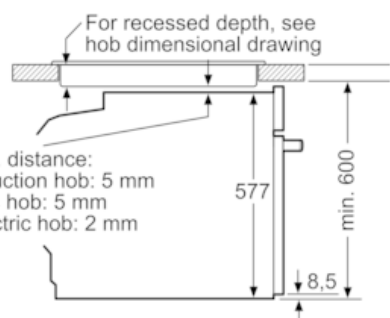

measurements in mm

If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	37 mm	38 mm
Full surface Induction hob	47 mm	48 mm
Gas hob	30 mm	38 mm
Electric hob	27 mm	30 mm