

H 2267-1 BP ACTIVE

Oven

with a timer, pyrolytic cleaning & FlexiClip runners.



- 7-segment display with retractable controls – EasyControl
- Minimal cleaning effort - Pyrolytic cleaning
- Lots of room and flexibility – 76 l cooking capacity on 5 levels
- Easy handling – FlexiClip runners
- Protects against burns – touch-cool fronts

A⁺

EAN: 4002516156710 / material number: 11093000

Model and design	
Built-in oven	•
Appliance colour	Stainless steel/Clean Steel
Retractable knobs	•
Convenience features	
Rapid heat-up	•
Operating modes	
Grill	•
Fan plus	•
Intensive bake	•
Conventional heat	•
Bottom heat	•
Fan grill	•
User convenience	
Display	EasyControl
Time of day display	•
Minute minder	•
Programmable end of cooking duration	•
Actual temperature display	•
Target temperature display	•
Audible signal when target temperature is reached	•
Recommended temperature	•
Individual settings	•
Efficiency and sustainability	
Energy efficiency class (A+++ - D)	A+
Cleaning convenience	
Stainless steel front with CleanSteel finish	•
Pyrolytic self-cleaning	•
Unheated catalyser	•
Hinged grill heater element	•
CleanGlass door	•
Safety	
Appliance cooling system and touch-cool fronts	•
Safety switch-off	•
System lock	•
Door lock during pyrolytic cleaning	•
Technical data	
No. of shelf levels	5
Numbered shelf levels	•
Oven light	1 halogen spot
Appliance width in mm	595
Appliance height in mm	596
Appliance depth in mm	569
Weight in kg	47.0
Total rated load in kW	3.6
Voltage in V	220-240
Number of phases	1
Fuse rating in A	16
Mains cable with plug	•
Length of supply lead in m	2

more information:
<http://www.miele.co.uk/domestic>

For further information please see next page...

H 2267-1 BP ACTIVE

Oven
with a timer, pyrolytic cleaning & FlexiClip runners.




Standard accessories	
Baking tray with PerfectClean	1
Universal tray with PerfectClean	1
Baking and roasting rack	1

H 2267-1 BP ACTIVE


Oven

with a timer, pyrolytic cleaning & FlexiClip runners.

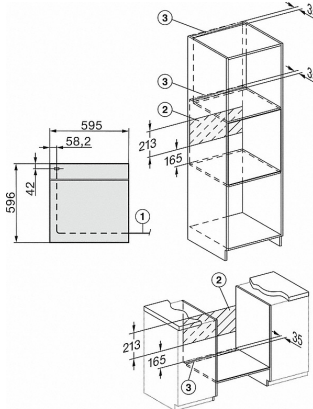


H226x-1B/BP/E/EP/I/IP, H2760B/BP, H28x0B/BP, H7x6xB/BP/BPX installation drawings

22 mm - glass
23,3 mm - metal

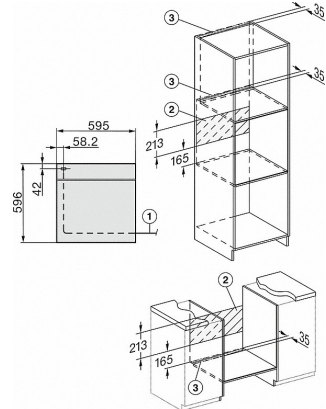


H226x-1B/BP/E/EP/I/IP, H2760B/BP, H28x0B/BP, H7x6xB/BP/BPX, installation drawings, GB, AUS

22 mm - glass
23.3 mm - metal

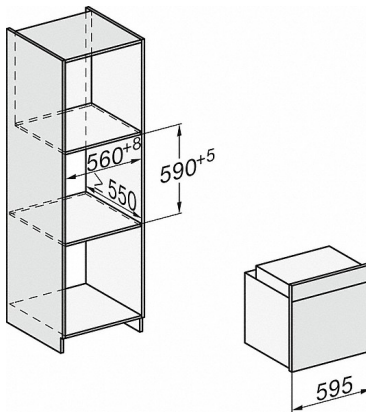

H226x-1B/BP/E/EP/I/IP, H2760B/BP, H28x0B/BP, H7x6xB/BP/BPX, installation drawings

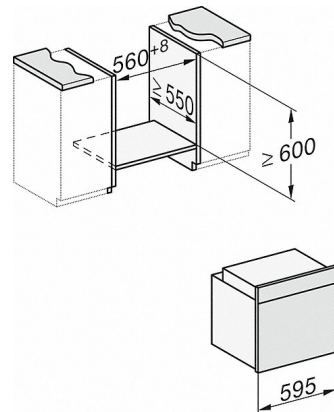


H226x-1B/BP/E/EP/I/IP, H2x6xB/BP, H7x6xB/BP/BPX, installation drawings

If the oven is to be installed under a hob, follow the instructions for installing the hob and the height of the hob.

H 2267-1 BP ACTIVE


Oven

with a timer, pyrolytic cleaning & FlexiClip runners.

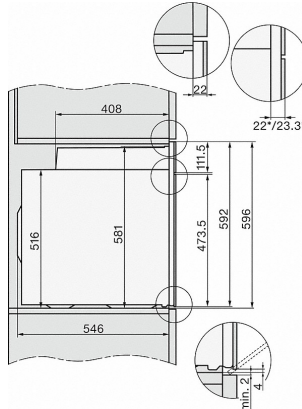


H2x6x-1B/BP/E/EP/I/JP, H2850BP, H7x6xB/BP/BPX, H2x6xB, installation drawings, GB, AUS

- 1) Mains connection cable, L=2000 mm
- 2) No connection in this area
- 3) Lüftungsausschnitt min. 150 cm²

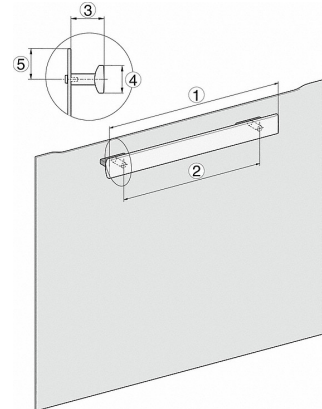

H226x-1B/BP/E/EP/I/JP, installation drawings

- 1) 400 mm
- 2) 360 mm
- 3) 42 mm
- 4) 27 mm
- 5) 32,5 mm

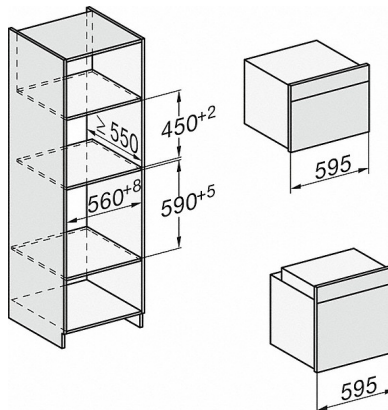

H226x-1B/BP/E/EP/I/JP, H2760B/BP, H28x0B/BP, H7x40BM/BMX, H7x6xB/BP/BPX, installation drawings