


N 70  
B47CR32N1B  
SINGLE OVEN



COOKING PASSION SINCE 1877



A+

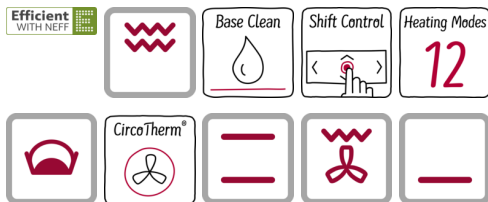

Built-in oven with SLIDE&HIDE® - unrestricted access to the oven interior

- ✓ Slide&Hide® - unrestricted access in the oven interior and easy handling due to rotating handle
- ✓ CircoTherm® - the unique hot air-system for simultaneous baking and roasting on up to 3 levels
- ✓ EcoClean - the self-cleaning catalytic coating on the inside top and sides of the oven makes oven cleaning easier.
- ✓ BaseClean - the special cleaning programme for the oven floor.
- ✓ Shift Control - fast navigation through menus and simple operation with the TFT display.
- ✓ TFT display - the high-resolution display takes you straight to the programme of your choice.

#### Features

##### Technical Data

Color / Material Front : Stainless steel  
Construction type : Built-in  
Integrated Cleaning system : Catalytic all sides, Hydrolytic  
Required niche size for installation (HxWxD) : 585-595 x 560-568 x 550  
Dimensions of the product (mm) : 595 x 596 x 548  
Dimensions of the packed product (HxWxD) (mm) : 675 x 690 x 660  
Control Panel Material : Stainless steel  
Door Material : Glass  
Net weight (kg) : 36.2  
Usable volume of cavity (l) : 71  
Cooking method : , Bottom heat, Bread Baking Setting, Conventional heat, Dough proving setting, Full width grill, Half width grill, Hot Air, Hot Air-Eco, Hot air grilling, low temperature cooking, Pizza setting  
First cavity material : Enamelled  
Temperature control : electronic  
Number of interior lights : 1  
Approval certificates : CE, VDE  
Length of electrical supply cord (cm) : 120  
EAN code : 4242004212638  
Number of cavities (2010/30/EC) : 1  
Energy efficiency class (2010/30/EC) : A+  
Energy consumption per cycle conventional (2010/30/EC) : 0.87  
Energy consumption per cycle forced air convection (2010/30/EC) : 0.69  
Energy efficiency index (2010/30/EC) : 81.2  
Electrical connection rating (W) : 2990  
Current (A) : 13  
Voltage (V) : 220-240  
Frequency (Hz) : 50; 60  
Plug type : no plug

#### Included accessories

2 x combination grid, 1 x universal pan

#### Optional accessories

Z11SZ80X0 SeamlessCombination 60 + 29cm  
Z11SZ90X0 SeamlessCombination 60 + 45cm  
Z18C60X0 Cookbook



4 242004 212638

N 70  
B47CR32N1B  
SINGLE OVEN

## Features

### Design

- 2.5" TFT colour display
- Illuminated Shift Control
- Cavity inner surface: Enamel anthracite
- Slide&Hide® with rotating handle

### Features

- Control panel lock
  - Automatic safety switch off
  - Residual heat indicator
  - Start button
  - Door contact switch
- Temperature proposal
  - Actual temperature display
  - Heating up indicator
  - Sabbath setting
- Interior halogen light
- Triple glazed door

### Cleaning

- EcoClean Direct : side liners, ceiling, back panel
- EcoClean programme, Base Clean programme
- Full glass inner door

### Programmes/functions

- 12 heating methods: CircoTherm®, CircoTherm® Gentle, Top/bottom heat, Conventional heat Gentle, Hot air grilling, Full surface grill, Centre surface grill, CircoTherm® intensive , Bread baking, Bottom heat, Low temperature cooking, Dough proving
- Rapid heat
- Cooling fan

### Accessories

- 2 x combination grid, 1 x universal pan


### Performance/technical information

- Energy efficiency rating (acc. EU Nr. 65/2014): A+
  - Energy consumption per cycle in conventional mode: 0.87 kwh
  - Energy consumption per cycle in fan-forced convection mode: 0.69 kwh
  - Number of cavities: Main cavity
  - Heat source: electrical
  - Cavity volume: 71 litre
- Total connected load electric: 2.99 KW
- Temperature range 40 °C - 275 °C
- Length of mains cable: 120 cm
- Nominal voltage: 220 - 240 V
- Appliance dimension (hwxwd): 595 mm x 596 mm x 548 mm
- Niche dimension (hwxwd): 585 mm - 595 mm x 560 mm - 568 mm x 550 mm
- Please refer to the dimensions provided in the installation manual

N 70  
B47CR32N1B  
SINGLE OVEN

Dimensioned drawings

Installation with a hob.

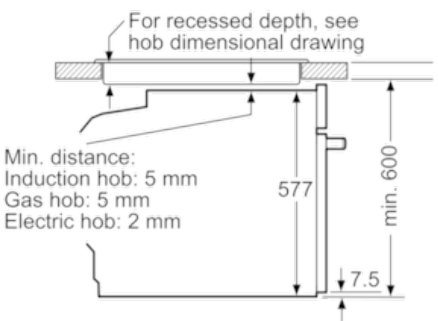

measurements in mm

If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	37 mm	38 mm
Full surface Induction hob	47 mm	48 mm
Gas hob	30 mm	38 mm
Electric hob	27 mm	30 mm

