


N 50, Built-in oven, Stainless steel  
B4ACM5HH0B



COOKING PASSION SINCE 1877



A

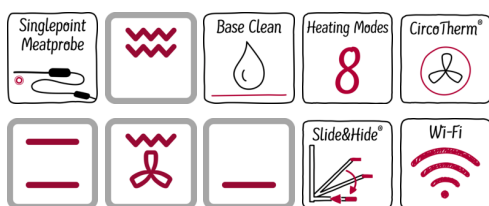

#### Optional accessories

Z11AB15A0	Baking tray, non-stick ceramic coated
Z11CB10E0	Baking tray, grey enamelled
Z11CR10X0	Baking and roasting grid (standard)
Z11GT10X3	Glass roasting dish, 5,4l
Z11TF36X0	3 level telescopic rails, full ext
Z11TI15X0	Cliprails
Z1913X0	Baking Stone
Z19DD10X0	Steam set for ovens

Built-in oven with Slide&Hide® - unrestricted access to the oven interior

- ✓ Slide&Hide® - unrestricted access in the oven interior and easy handling due to rotating handle
- ✓ CircoTherm® - our smart hot-air solution for simultaneous baking and roasting on up to three levels
- ✓ Eco Clean with Base Clean - the duo that makes oven cleaning easier
- ✓ LCD-Display - simple, straightforward with large characters for clear reading
- ✓ Home Connect - rediscover your kitchen with our connected home appliances, from wherever you are.
- ✓ SinglePoint MeatProbe - ensures meats are cooked perfectly every time
- ✓ Clip-on Rail - easily removed and installed telescopic rails for flexible use on all shelf levels

#### Features

##### Technical Data

Color / Material Front : Stainless steel

Construction type : Built-in

Integrated Cleaning system : Catalytic all sides, Catalytic all sides, Hydrolytic

Required niche size for installation (HxWxD) : 585-595 x 560-568 x 550

Dimensions of the product (mm) : 595 x 594 x 548

Dimensions of the packed product (HxWxD) (mm) : 675 x 690 x 660

Control Panel Material : Glass

Door Material : Glass

Net weight (kg) : 36.547

Usable volume of cavity (l) : 71

Cooking method : Bottom heat, Bread Baking Setting, Conventional heat, Full width grill, Hot Air, Hot air grilling, Pizza setting

First cavity material : Other

Oven control : electronic

Number of interior lights : 1

Approval certificates : CE, VDE

Length of electrical supply cord (cm) : 120

EAN code : 4242004245490

Number of cavities (2010/30/EC) : 1

Energy efficiency class (2010/30/EC) : A

Energy consumption per cycle conventional (2010/30/EC) : 1.04

Energy consumption per cycle forced air convection (2010/30/EC) : 0.81

Energy efficiency index (2010/30/EC) : 95.3

Connection rating (W) : 2990

Current (A) : 13

Voltage (V) : 220-240

Frequency (Hz) : 50; 60

Plug type : no plug



4 242004 245490

## N 50, Built-in oven, Stainless steel

B4ACM5HH0B

### Features

#### Design

- LCD-Display Control (white)
- Enamel grey

#### Features

- HomeConnect ready on WLAN
- Control panel lock Automatic safety switch off Residual heat indicator Door contact switch
- Temperature proposal Actual temperature display Heating up indicator Sabbath setting Automatic start
- Single-point meat probe
- Interior halogen light

#### Cleaning

- EcoClean Direct : ceiling, back panel, side liners
- EcoClean programme, Base Clean programme

#### Programmes/functions

- Rapid heat
- Cooling fan

#### Accessories


- 1 Clip rail, Stop function
- 1 x enamel baking tray, 1 x combination grid, 1 x universal pan

#### Performance/technical information



- Energy efficiency rating (acc. EU Nr. 65/2014): A Energy consumption per cycle in conventional mode: 1.04 kWh Energy consumption per cycle in fan-forced convection mode: 0.81 kWh Number of cavities: Main cavity Heat source: electrical Cavity volume: 71 litre
- Total connected load electric: 2.99 KW
- 120 cm Cable length
- Nominal voltage: 220 - 240 V
- Appliance dimension (h x w x d): 595 mm x 594 mm x 548 mm
- Niche dimension (h x w x d): 585 mm - 595 mm x 560 mm - 568 mm x 550 mm
- Please refer to the dimensions provided in the installation manual

N 50, Built-in oven, Stainless steel  
B4ACM5HH0B

Dimensioned drawings

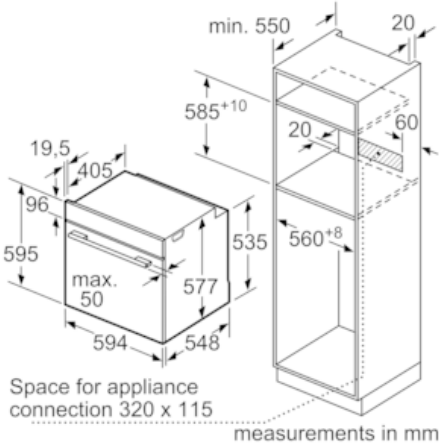

Installation with a hob.

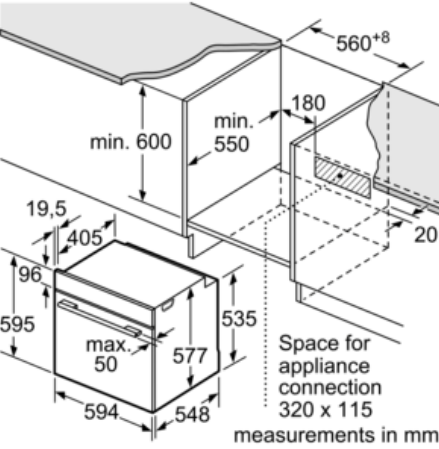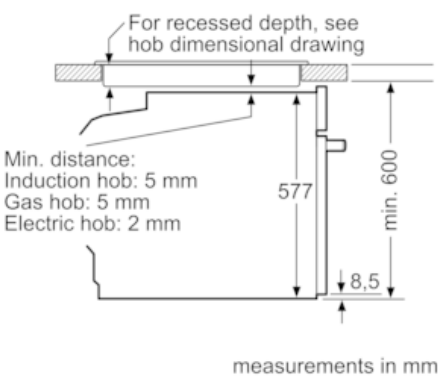

If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	37 mm	38 mm
Full surface Induction hob	47 mm	48 mm
Gas hob	30 mm	38 mm
Electric hob	27 mm	30 mm

