


N 70
B57VR22N0B
OVEN WITH VARIOSTEAM



COOKING PASSION SINCE 1877



A+

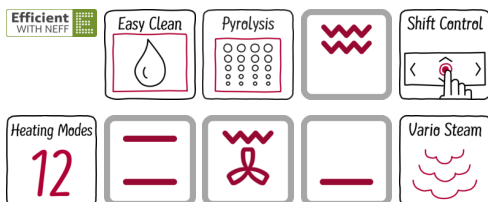

Built-in oven with VarioSteam® and SLIDE&HIDE® - fuller flavour and unrestricted access to the oven interior

- ✓ Slide&Hide® - unrestricted access in the oven interior and easy handling due to rotating handle
- ✓ CircoTherm® - the unique hot air-system for simultaneous baking and roasting on up to 3 levels
- ✓ VarioSteam® - Steam assistance for CircoTherm® ovens, that cooks foods moist on the inside and crisp on the outside
- ✓ Dual cleaning options:
- ✓ Pyrolytic following heavy use - just let the oven interior clean itself.
- ✓ EasyClean® - the quick and easy option for day to day maintenance.
- ✓ Shift Control - fast navigation through menus and simple operation with the TFT display.
- ✓ Modern LED lighting for bright, even illumination

Features

Technical Data

Color / Material Front : Stainless steel
Construction type : Built-in
Integrated Cleaning system : Hydrolytic, Pyrolytic
Required niche size for installation (HxWxD) : 585-595 x 560-568 x 550
Dimensions of the product (mm) : 595 x 596 x 548
Dimensions of the packed product (HxWxD) (mm) : 675 x 690 x 660
Control Panel Material : Stainless steel
Door Material : Glass
Net weight (kg) : 43.278
Usable volume of cavity (l) : 71
Cooking method : , 4D hot air, Bottom heat, Bread Baking Setting, Conventional heat, Full width grill, Half width grill, Hot Air-Eco, Hot air grilling, low temperature cooking, Pizza setting, warming
First cavity material : Enamelled
Temperature control : electronic
Number of interior lights : 1
Approval certificates : CE, VDE
Length of electrical supply cord (cm) : 120
EAN code : 4242004181965
Number of cavities (2010/30/EC) : 1
Energy efficiency class (2010/30/EC) : A+
Energy consumption per cycle conventional (2010/30/EC) : 0.87
Energy consumption per cycle forced air convection (2010/30/EC) : 0.69
Energy efficiency index (2010/30/EC) : 81.2
Electrical connection rating (W) : 3450
Current (A) : 16
Voltage (V) : 220-240
Frequency (Hz) : 50; 60
Plug type : no plug

Included accessories

2 x combination grid, 1 x universal pan

Optional accessories

Z11CR10X0 Baking and roasting grid (standard)
Z11SZ80X0 SeamlessCombination 60 + 29cm
Z11SZ90X0 SeamlessCombination 60 + 45cm
Z11TC10X0 ComfortFlex Rail (1 level)
Z12CB10A0 Baking tray, anthracite enamelled
Z12CM10A0 Moussaka pan, anthracite enamelled
Z12CQ10A0 Grill tray, anthracite enamelled
Z18V60X0 Cookbook



4 242004 181965

N 70
B57VR22N0B
OVEN WITH VARIOSTEAM

Features

Design

- 2.5" TFT colour display
- Illuminated Shift Control
- Cavity inner surface: Enamel anthracite
- Slide&Hide® with rotating handle

Features

- Control panel lock
Automatic safety switch off
Residual heat indicator
Start button
Door contact switch
- Temperature proposal
Actual temperature display
Heating up indicator
Sabbath setting
- Automatic programmes
- Water tank empty indicator
- Quadruple glazed door

Cleaning

- Pyrolytic cleaning
- EasyClean
- De-scaling programme
- Full glass inner door

Programmes/functions

- 12 heating methods: CircoTherm®, CircoTherm® Gentle, Top/bottom heat, Conventional heat Gentle, Hot air grilling, Full surface grill, Centre surface grill, CircoTherm® intensive, Bread baking, Bottom heat, Low temperature cooking, Keep warm
- Additional heating methods with steam: Reheat, Dough proving
- Additional functions:
De-scaling programme
Drying function
- Number of automatic programmes: 14 PC
- Rapid heat
- Cooling fan

Accessories

- 2 x combination grid, 1 x universal pan


Performance/technical information

- Energy efficiency rating (acc. EU Nr. 65/2014): A+
Energy consumption per cycle in conventional mode: 0.87 kwh
Energy consumption per cycle in fan-forced convection mode: 0.69 kwh
Number of cavities: Main cavity
Heat source: electrical
Cavity volume: 71 litre
- 1 l Water tank capacity
- Location of the steam generator is outside of the cavity
- Total connected load electric: 3.45 KW
- Temperature range 40 °C - 275 °C
- Length of mains cable: 120 cm
- Nominal voltage: 220 - 240 V
- Appliance dimension (hxwxh): 595 mm x 596 mm x 548 mm
- Niche dimension (hxwxh): 585 mm - 595 mm x 560 mm - 568 mm x 550 mm
- Please refer to the dimensions provided in the installation manual

N 70
B57VR22NOB
OVEN WITH VARIOSTEAM

Dimensioned drawings

Installation with a hob.

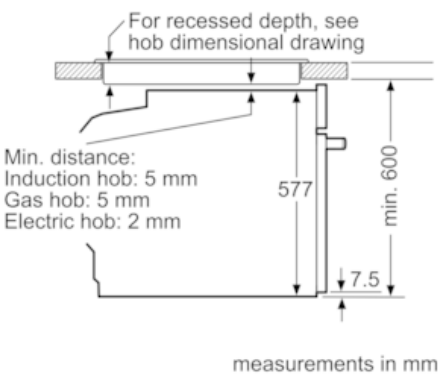

If the appliance will be installed underneath
a hob, the following worktop thicknesses
(including substructure if necessary)
must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	37 mm	38 mm
Full surface Induction hob	47 mm	48 mm
Gas hob	30 mm	38 mm
Electric hob	27 mm	30 mm

