


N 90
B57VS24N0B
OVEN WITH VARIOSTEAM
STAINLESS STEEL



COOKING PASSION SINCE 1877



A

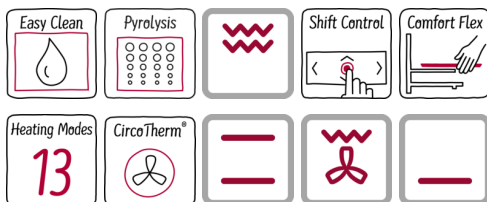

Built-in oven with VarioSteam® and SLIDE&HIDE® - fuller flavour and unrestricted access to the oven interior

- ✓ Slide&Hide® - unrestricted access in the oven interior and easy handling due to rotating handle
- ✓ VarioSteam® - Steam assistance for CircoTherm® ovens, that cooks foods moist on the inside and crisp on the outside
- ✓ Dual cleaning options:
- ✓ Pyrolytic following heavy use - just let the oven interior clean itself.
- ✓ EasyClean® - the quick and easy option for day to day maintenance.
- ✓ Shift Control - fast navigation through menus and simple operation with the generous TFT display.
- ✓ ComfortFlex® - the telescopic rails come out far enough to let you grasp the baking sheet conveniently from the sides.
- ✓ Modern LED lighting for bright, even illumination.

Features

Technical Data

Color / Material Front : Stainless steel
Built-in / Free-standing : Built-in
Integrated Cleaning system : Hydrolytic, Pyrolytic
Required niche size for installation (HxWxD) : 585-595 x 560-568 x 550
Dimensions of the product (mm) : 595 x 596 x 548
Dimensions of the packed product (HxWxD) (mm) : 675 x 690 x 660
Control Panel Material : Stainless steel
Door Material : Glass
Net weight (kg) : 45.2
Usable volume (of cavity) - cavity 1 (l) : 71
Cooking method : , Bottom heat, Bread Baking Setting, Conventional heat, Defrost, Full width grill, Half width grill, Hot Air, Hot Air-Eco, Hot air grilling, low temperature cooking, Pizza setting, warming
First cavity material : Enamelled
Temperature control : electronic
Number of interior lights : 1
Approval certificates : CE, VDE
Length electrical supply cord (cm) : 120
EAN code : 4242004181996
Number of cavities (2010/30/EC) : 1
Energy efficiency class (2010/30/EC) : A
Energy consumption per cycle conventional (2010/30/EC) : 0.90
Energy consumption per cycle forced air convection (2010/30/EC) : 0.74
Energy efficiency index (2010/30/EC) : 87.1
Electrical connection rating (W) : 3450
Current (A) : 16
Voltage (V) : 220-240
Frequency (Hz) : 60; 50
Plug type : no plug

Included accessories

2 x combination grid, 1 x universal pan

Optional accessories

Z11SZ80X0 SeamlessCombination 60 + 29cm
Z11SZ90X0 SeamlessCombination 60 + 45cm
Z18V60X0 Cookbook



4 242004 181996

N 90
B57VS24NOB
OVEN WITH VARIOSTEAM
STAINLESS STEEL

Features

Design

- 4.1" TFT colour and graphics display with ShiftControl
- Illuminated Shift Control
- Slide&Hide® with rotating handle

Features

- Temperature proposal
Actual temperature display
Heating up indicator
automatic programmes:
Sabbath setting
- Control panel lock
Automatic safety switch off
Residual heat indicator
Start button
Door contact switch
- Baking and roasting assistant, Automatic programmes
- Water tank empty indicator
- LED light
- Quadruple glazed door
- 1-level flexible telescopic rail, full extension, Stop function
- Cavity inner surface: Enamel anthracite

Cleaning

- Pyrolytic cleaning
- EasyClean
- De-scaling programme
- Full glass inner door

Programmes/functions

- Oven with 13 heating methods: CircoTherm®, CircoTherm® Eco, Top/bottom heat, Conventional heat eco, Hot air grilling, Full surface grill, Centre surface grill, CircoTherm® intensive, Bread baking, Bottom heat, Low temperature cooking, Defrost, Keep warm
- Additional heating methods with steam: Reheat, Dough proving
- Additional functions:
De-scaling programme
Drying function
- Number of automatic programmes: 14 PC
- Rapid heat
- Cooling fan
- Info button

Standard accessories

- 1-level flexible telescopic rail, full extension, Stop function
- 2 x combination grid, 1 x universal pan


Technical information

- Energy efficiency rating (acc. EU Nr. 65/2014): A
Energy consumption per cycle in fan-forced convection mode:
0.74 kwh
Number of cavities: 1
Heat source: electrical
Cavity volume: 71 litre
- 1 l Water tank capacity
- Location of the steam generator is outside of the cavity
- Temperature range 40 °C - 275 °C
- Length of mains cable: 120 cm
- Total connected load electric: 3.45 KW
- Appliance dimension (h x w x d): 595 mm x 596 mm x 548 mm
- Niche dimension (h x w x d): 585 mm - 595 mm x 560 mm - 568 mm x 550 mm
- Please refer to the dimensions provided in the installation manual

N 90
B57VS24NOB
OVEN WITH VARIOSTEAM
STAINLESS STEEL

Dimensioned drawings

Installation with a hob.

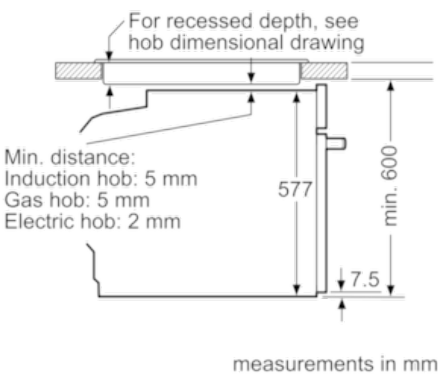

If the appliance will be installed underneath
a hob, the following worktop thicknesses
(including substructure if necessary)
must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	37 mm	38 mm
Full surface Induction hob	47 mm	48 mm
Gas hob	30 mm	38 mm
Electric hob	27 mm	30 mm