

## iQ500, Built-in double oven, Stainless steel NB557ABS0B



Shorten your cooking time thanks to fast preheat.

- ✓ fast preheat: reach the required cooking temperature sooner.
- ✓ 3D hotAir: perfect baking results on up to 3 shelves thanks to innovative heat distribution.
- ✓ ecoClean Plus: effortless cleaning thanks to a special coating inside the oven that automatically disintegrates dirt and reduces odours significantly - in both compartments.

### Features

#### Technical Data

Color / Material Front : Stainless steel  
Construction type : Built-in  
Integrated Cleaning system : No  
Dimensions of the product (mm) : 717 x 594 x 550  
Dimensions of the packed product (HxWxD) (mm) : 790 x 690 x 660  
Control Panel Material : Glass  
Door Material : Glass  
Net weight (kg) : 47.922  
Usable volume of cavity (l) : 47  
Cooking method : Bottom heat, Conventional heat, Full width grill, Hot Air, Hotair gentle, Hot air grilling, Pizza setting  
Temperature control : No control of the temperature  
Number of interior lights : 1  
Approval certificates : CE, VDE  
EAN code : 4242003803271  
Energy efficiency class (2010/30/EC) : A  
Energy consumption per cycle conventional (2010/30/EC) : 0.84  
Energy consumption per cycle forced air convection (2010/30/EC) : 0.71  
Energy efficiency class (2010/30/EC) - cavity 2 : B  
Energy consumption per cycle conventional - cavity 2 (2010/30/EC) : 0.83  
Energy efficiency index (2010/30/EC) : 94.7  
Energy efficiency index cavity 2 (2010/30/EC) : 120.3  
Electrical connection rating (W) : 5600  
Current (A) : 25  
Voltage (V) : 220-240  
Frequency (Hz) : 50  
Plug type : fixed connection, no plug

### Included accessories

2 x combination grid  
1 x universal pan

### Optional accessories

HZ915003 Glass roasting dish, 5,4 L  
HZ636000 Glass pan  
HZ634000 Baking and roasting grid (standard)  
HZ625071 Grill tray, anthracite enamelled  
HZ538000 varioClip rail  
HZ531010 Baking tray, non-stick ceramic coated  
HZ531000 Baking tray, grey enamelled



4 242003 803271

## iQ500, Built-in double oven, Stainless steel

### NB557ABS0B

#### Features

##### Design

- White display with blue indicator lights
- Bar handle
- lightControl: intuitive operation thanks to the illuminated dials

##### Main Lower oven

- Oven capacity: 47 litre
- 1 interior halogen light
- Smooth enamelled oven interior, Removable wire shelf support rails
- Heating-up indicator
- Cavity with shelf support rails

##### Cleaning

- ecoClean® programme
- Full glass inner door

##### Programmes/functions

- Oven with 7 heating methods: 3D hot air, conventional top & bottom heating, hot air grilling, full width grill, Pizza setting, bottom heat, Hotair gentle
- fast preheat function

##### Secondary top oven

- Cavity volume: 34 l
- Smooth enamelled oven interior, Removable wire shelf support rails
- 1 interior halogen light

##### Cleaning

- EcoClean Direct :ceiling, side liners, back panel
- Full glass inner door

##### Programmes/functions

- Oven with 4 heating methods: conventional oven, Large-area grill, Small area grill, bottom heat

##### Accessories


- 2 x combination grid, 1 x universal pan
- Cavity with shelf support rails

##### Performance/technical information

- Energy efficiency rating (acc. EU Nr. 65/2014): B
- Energy consumption per cycle conventional mode: 0.83 kwh
- Number of cavities: Top Cavity
- Heat source: electrical
- Cavity volume: 34 l
- Nominal voltage: 220 - 240 V
- Appliance dimension (hwxwd): 717 mm x 594 mm x 550 mm
- Please refer to the dimensions provided in the installation manual
- Energy efficiency rating (acc. EU Nr. 65/2014): B (at a range of energy efficiency classes from A+++ to D)
- Energy consumption per cycle in conventional mode: 0.84 kwh
- Energy consumption per cycle in fan-forced convection mode: 0.71 kwh
- Number of cavities: 2
- Heat source: electrical

iQ500, Built-in double oven, Stainless steel  
NB557ABS0B

Dimensioned drawings

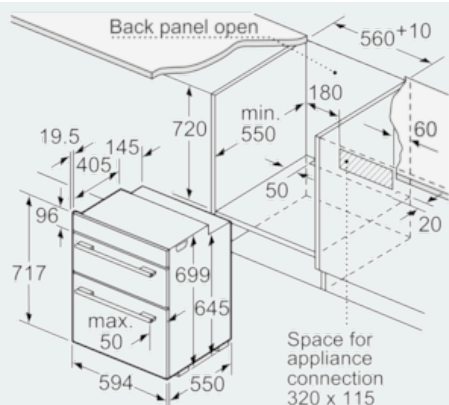


measurements in mm

measurements in mm  
If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	39	40
Full-surface induction hob	49	50
Gas hob	29	40
Electric hob	29	32

measurements in mm  
Installation with a hob



- A: Recessed depth 29-50 mm. See hob dimensional drawing.  
B: Min. distance:  
Induction hob: 5 mm  
Gas hob: 5 mm  
Electric hob: 2 mm

measurements in mm

