




Basin mixer Installation

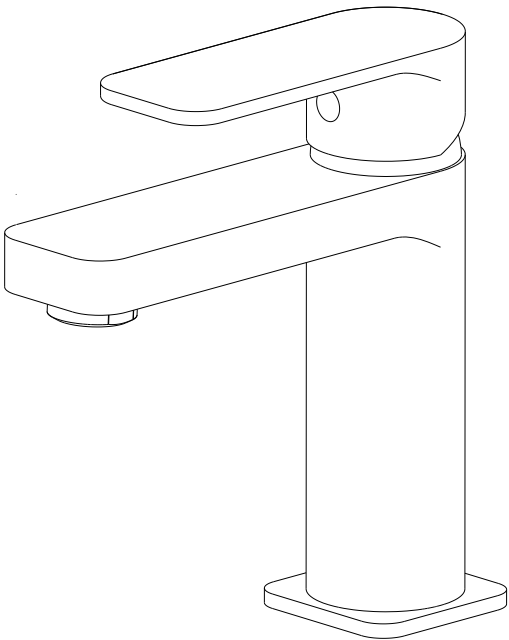



Optional Basin Waste

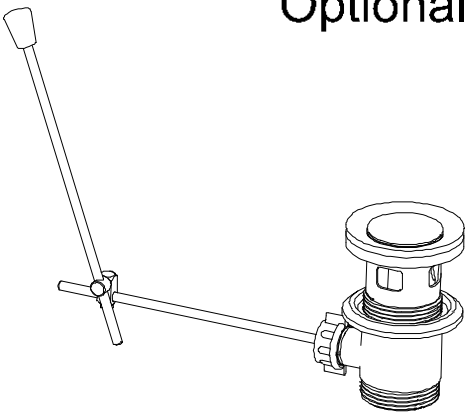

Pop Up Waste



Click Waste

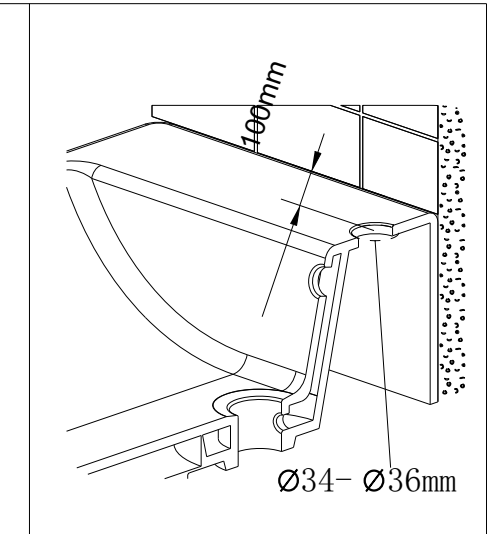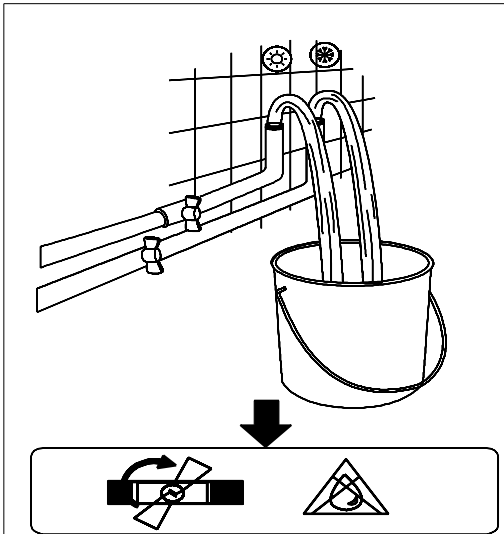

Product Specification		NOTE: ISOLATION VALVE NOT SUPPLIED
Minimum Pressure 0.5bar	Maximum Pressure 6.0bar	

Cleaning

All surfaces should be cleaned using a clean damp cloth. No abrasive cleaning agents or materials should be used.

Flexible Connecting Pipes

Care must be taken when connecting the flexible connection pipes to the household pipework to ensure they do not bend sharply and kink or twist.

Slight bend

90° Angle

Kink

Curved round

Twists

✓

✓

✗

✗


✗

⚠


Important: Failure to follow these guidelines may result in poor performance and damage to the flexible connecting pipes.

Horse Shoe Type Fixing Kit


1

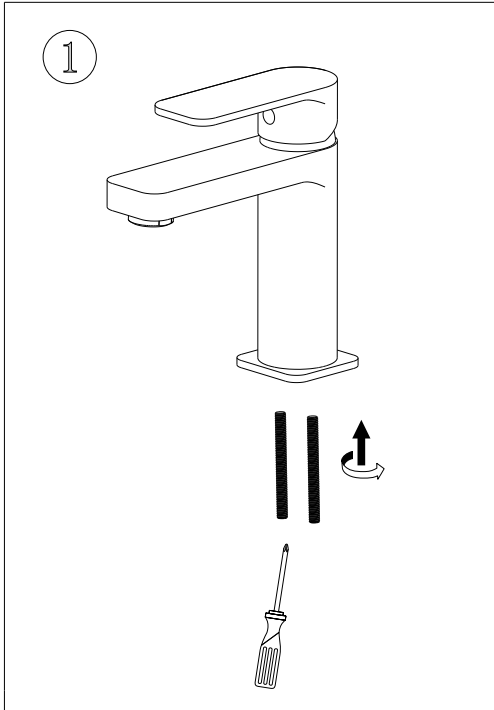


2

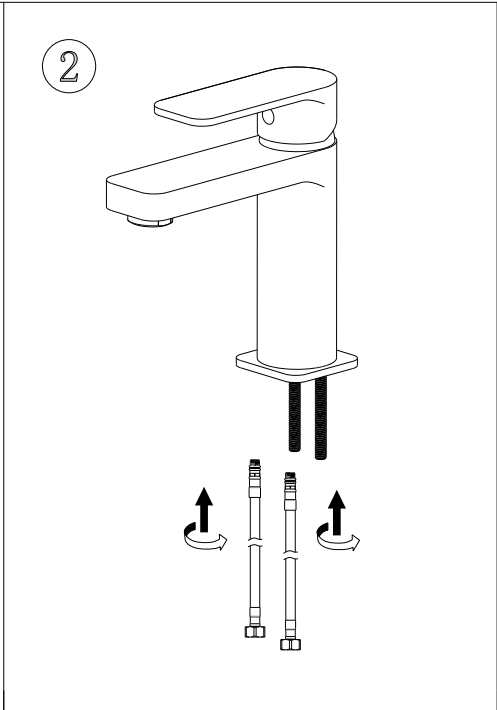


3

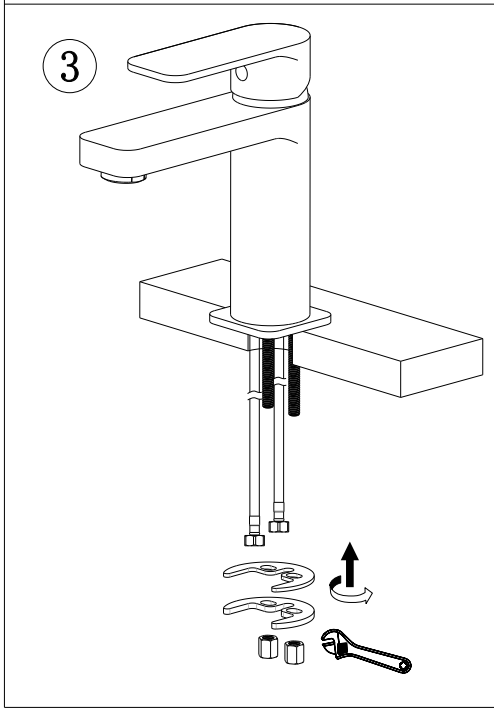


4

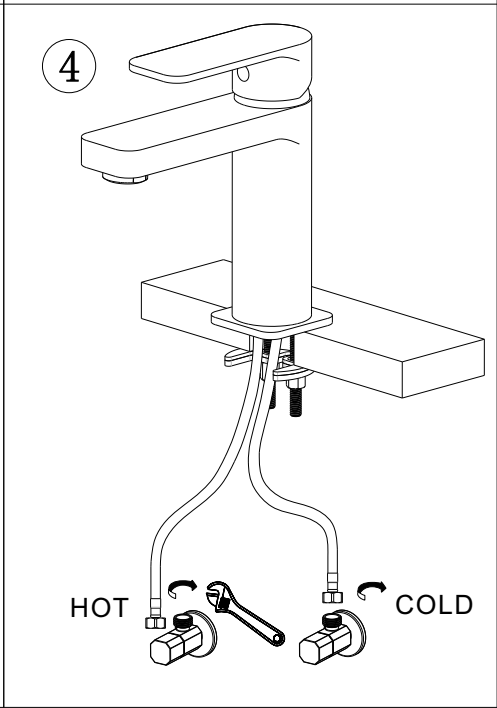

Locknut With Screw Fixing Kit

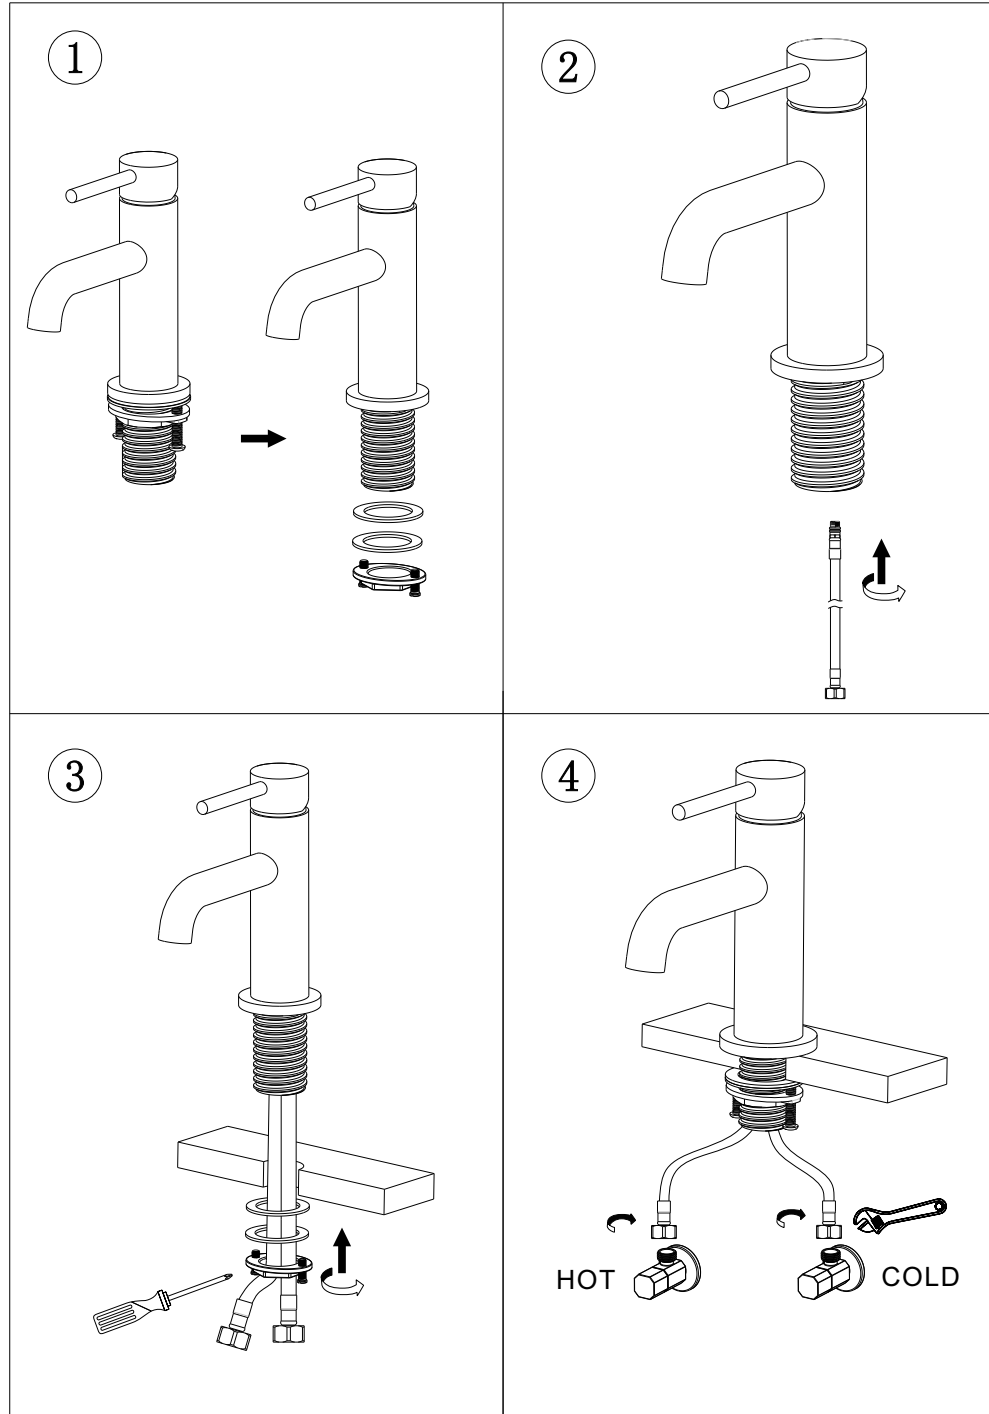

Securing Collar Fixing Kit

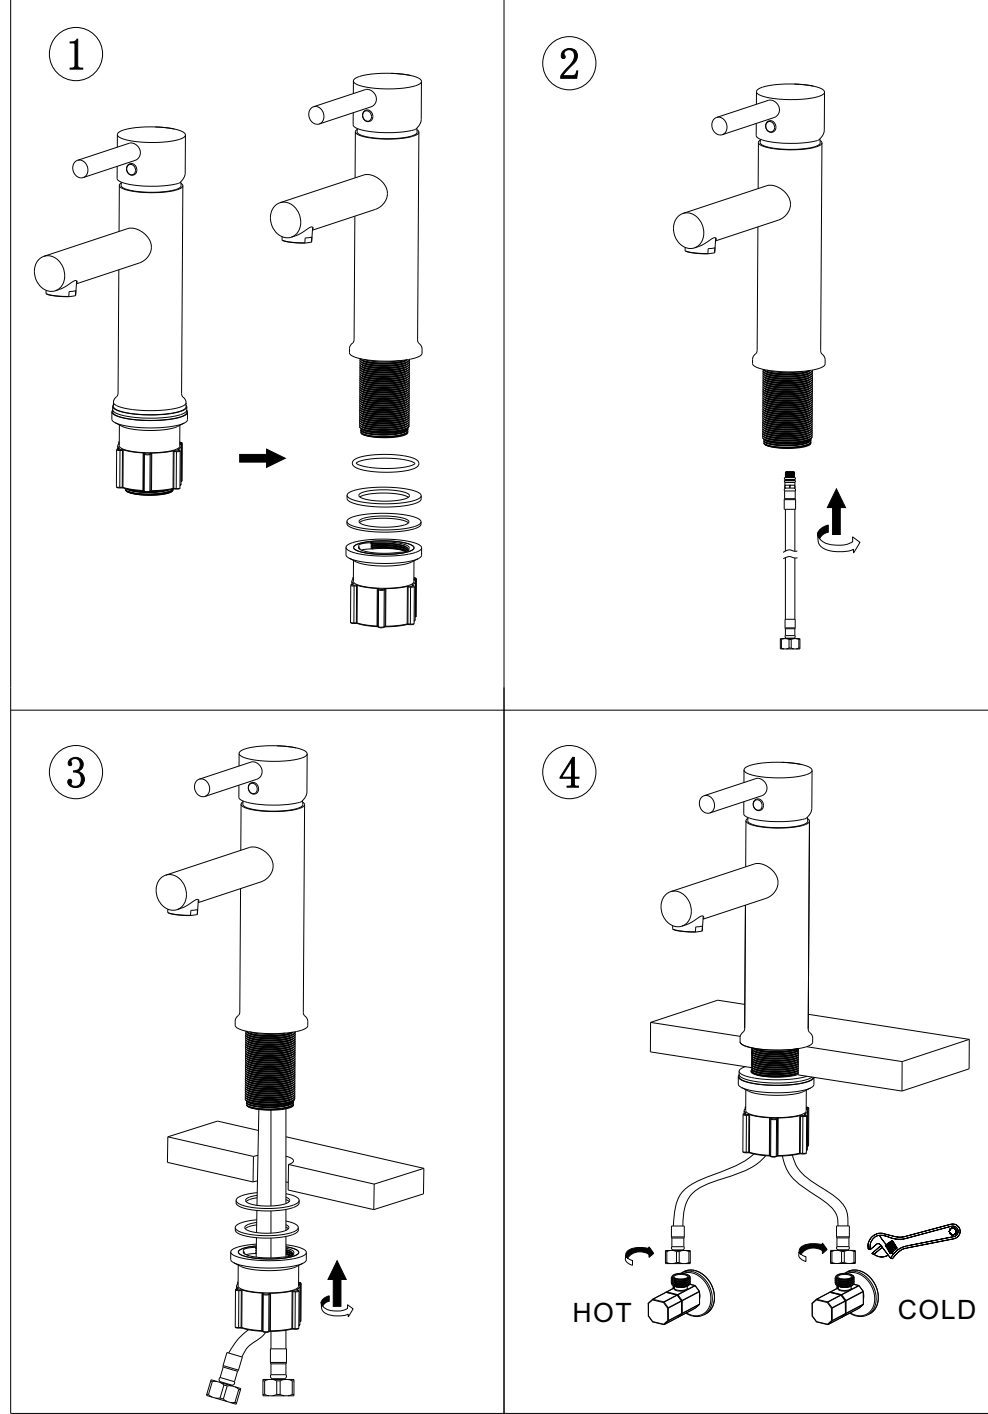

Locknut Fixing Kit

