USER MANUAL




Thank you for choosing Better Bathrooms.

Please read this manual before installing your product and keep for future reference.



BACK LIT PILL SHAPED MIRROR (500 x 800mm)

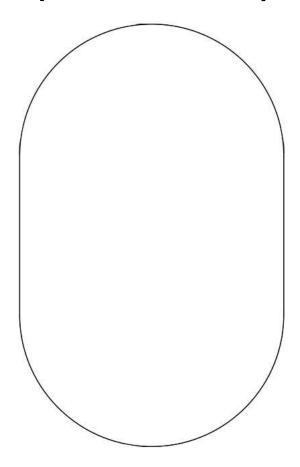


BeBa 27580

- SINGLE-PERSON ASSEMBLY
- LED LIGHT
- IP44 INGRESS PROTECTION

SAFETY


- The fitting should be installed by a qualified electrician.
- This fitting is only suitable for connection to a 220V~50Hz earthed supply in accordance with current IEE wiring regulations, and should be installed in accordance with local Building Regulations.
- This is for domestic, indoor use only.
- The fitting should be connected to a dedicated lighting circuit which must be protected by a 5-amp fuse (or a 6amp miniature circuit breaker).
- Before installing the fitting ensure the mains supply is switched off, and that the appropriate fuse is removed (or appropriate circuit breaker is switched off) before commencing installation. Ensure that measures are taken to prevent the supply from being inadvertently reconnected.
- If there is a "Minimum Distance" Label, please do not allow Flammable Materials to rest within that distance from the lamps.
- This product may contain delicate parts be careful during handling and maintenance to avoid breakage.
- If any modification is made to the fitting it will invalidate the warranty and may render the product unsafe.
- A defective appliance may cause electric shock. Never switch on a defective appliance. Unplug the appliance from the mains or switch off at the circuit breaker in the fuse box before seeking assistance.
- This product is IP44 rated, and so no part of the installation is allowed to be within bathroom Zones 0,1. Installation is permitted within Zone 2.
- This product must be earthed.

BATHROOM ZONES

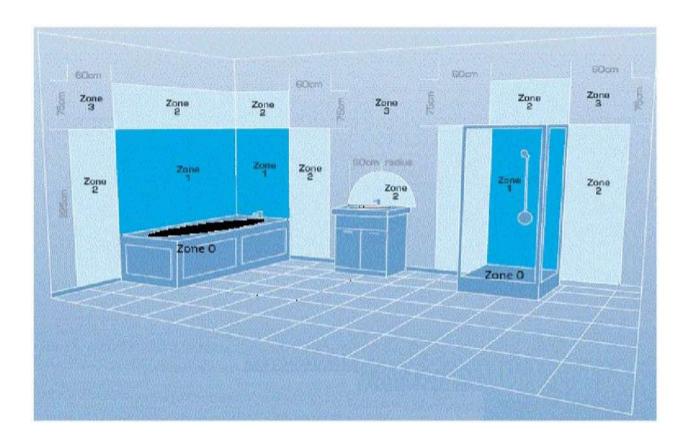


Zone 0:	The interior of the bathtub or shower basin.	
	The area around the bathtub or shower	
Zone 1:	basin up to a height of 2.25m above the	
	floor	
Zone 2:	The area stretching to 0.6m outside the bath	
	or shower and above the bath or shower if	
	over 2.25m	


PARTS LIST

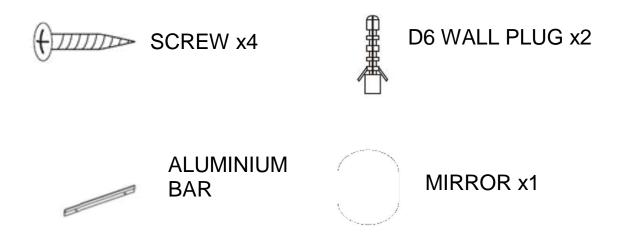

TOOLS NEEDED FOR INSTALLATION

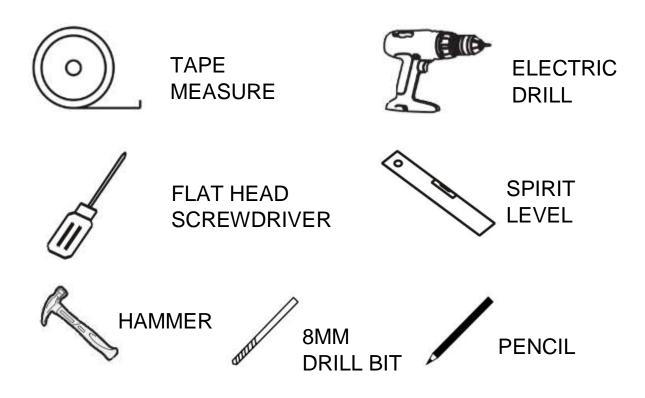

PRODUCT OVERVIEW

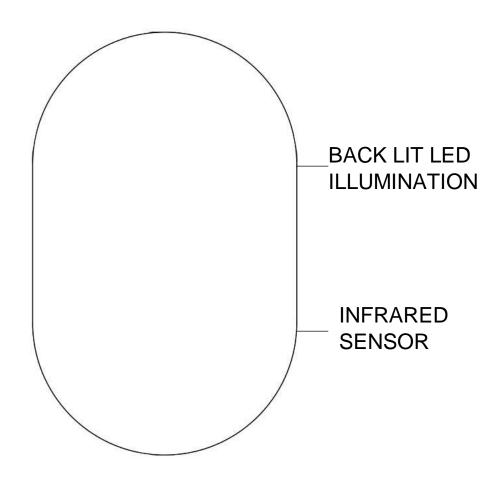

INSTALLATION

IMPORTANT: Before commencing installation, ensure that there are no pipes or wires located behind the wall that you will be drilling into.

- Ensure that the hanging location has been decided upon and marked clearly to avoid unwanted damage in the wall due to incorrect positioning.
- Check there the mirror is not damaged prior to installation.
- Take care unpacking, do not use a sharp blade to open as this may damage the mirror and void your warranty.


INSTALLATION

The cabinet is supplied with a hanging bar to mount the cabinet onto the wall. At the back of the cabinet there is a corresponding bar which is designed to slot onto the hanging bar.

- 1. Choose the desired position of the cabinet, and from that determine the required position of the hanging bar.
- 2. Hold the hanging bar in position, using a spirit level to ensure it is level.
- 3. Use a pencil to mark the position of the 3 holes on the wall.
- 4. Place the hanging bar to one side, and drill the holes with a suitable drill bit.
- 5. Insert wall plugs into the holes, ensuring they are flush to the wall.
- 6. Place the hanging bar onto the wall, lining up the 3 holes with the wall plugs.
- 7. Secure the hanging bar to the wall using the supplied screws.




- 8. You will now be able to hang the cabinet. Carefully lower the cabinet onto the hanging bar, ensuring that is secure and will not slide.
- 9. Open the cabinet door and mark the wall with a pencil through the security hole on the back panel.
- 10. Remove the cabinet, drill the hole then place a wall plug into the hole you have just drilled.
- 11. Hang your cabinet back up onto the hanging bar and ensure that the in the cabinet is lined up with the wall plug.
- 12. The cabinet should now be connected to a suitable fused spur following current regulations and guidance. We would advise for this to be situated directly behind the cabinet below the hanging bar. When connecting ensure that enough cable is left to allow the cabinet to be safely removed from the hanging bar.
- 13. Secure the cabinet to the wall using a screw through the security hole and into the wall plug you previously installed.

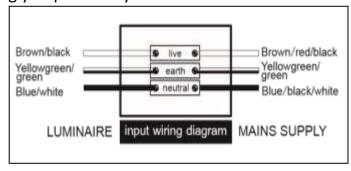

OPERATION

Your mirror comes with an infrared sensor located on the right hand side. To activate the light and demisting pad, move your hand across the sensor once at a distance of around 5cm.

To turn it off, move your hand across the sensor again.



CLEANING AND MAINTENANCE

Never use products containing bleach or abrasive cleaners, as this will have a detrimental effect on the appearance and lifespan of the product.

Use a clean microfibre cloth to clean the mirror.

TECHNICAL SPECIFICATION

Model	BeBa-27580
WxHxD (mm)	500x800x30
Net Weight (Kg)	4.9
Power Cord Length	50
(cm)	
Rated Power	33 W
IP Rating	IP44
Input	220 V - 240 V
	50 Hz

This product contains a light source of energy efficiency class F.

DISPOSAL



Recycling facilities are now available for all customers at which you can deposit your old electrical products. Customers will be able to take any old electrical equipment to participating sites run by their local councils.

Please remember that this equipment will be further handled during the recycling process, so please be considerate when depositing your equipment. Please contact the local council for details of your local household waste recycling centers.

At the time of printing the product contains no substances listed within Annex XIV of the Reach Regulations (EC) 1907/2006. In accordance with Article 59 of the same regulation the following substances are contained within the product at permitted levels: Cadmium.

As a responsible manufacturer the regulations are monitored to ensure continued compliance. Further information can be provided upon request.