

USER MANUAL



Thank you for choosing Better Bathrooms.
Please read this manual before installing your product
and keep for future reference.

better 
bathrooms

Basin Overflow Covers

Removal of existing overflow cover (if necessary):


This can be done by simply pulling the overflow cover from the hole/slot in the basin, no tools should be required. However if it is too tight to pull off by hand, a thin bladed screwdriver could be used, but take care not to scratch the basin in doing this, if a screwdriver is to be used it is recommended to place a thin piece of cloth between the blade and the basin to prevent scratching.

Installation

Step 1 – Remove the new overflow cover from the bag and check for damage before installation

Step 2 - Ensure the overflow hole on the basin is clean of debris

Step 3 – Insert the teeth of the overflow cover into the hole until the outer ring is flush with the basin surface – do not force the cover as this could break the teeth

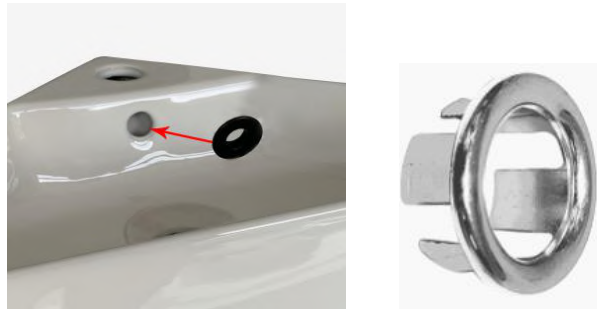

Cleaning:

To maintain the surface finish of the overflow cover, clean regularly using only a clean damp cloth, do not use any abrasive cleaning agents or materials as this will affect the plated finish.

**We hope your new product goes above and beyond your expectations.
However, should any problems occur, please:**

- **log in to your account and contact our customer services team via your self-serve portal – betterbathrooms.com/CustomerAccount/Login**
- **contact us via betterbathrooms.com/content/contact-us**

For more information

- visit betterbathrooms.com
- email customerservices@buyitdirect.co.uk
- call 0330 390 3062
- write to Trident Business Park, Neptune Way, Huddersfield, HD2 1UA

better 
bathrooms

Part of the BuyItDirect Group