


AQUALISA

SAFE TOUCH ROUND SHOWER COLUMN

RNDSCBV2.MB

HP
MATT BLACK

DIMENSIONAL DRAWINGS

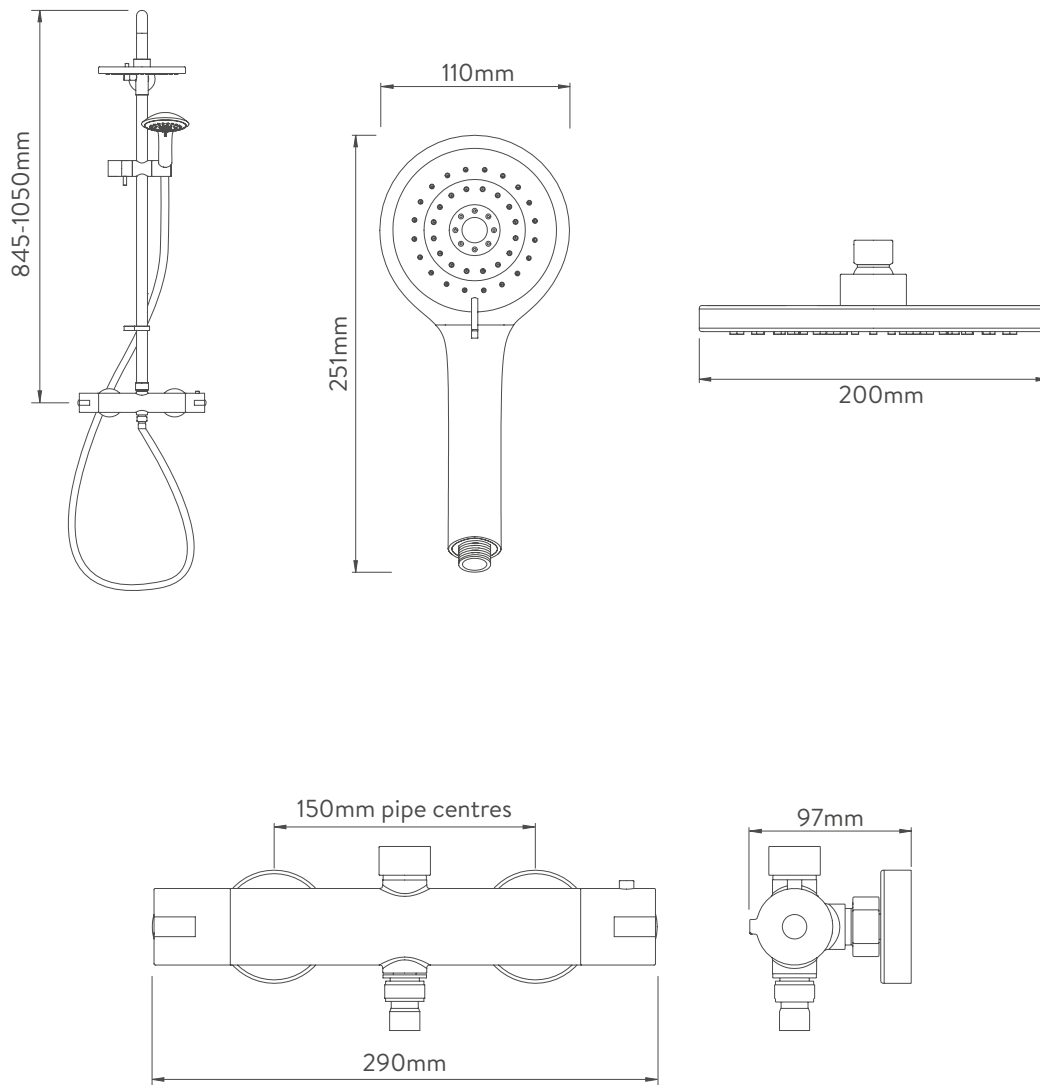

AQUALISA

SAFE TOUCH ROUND SHOWER COLUMN



RNDSCBV2.MB

HP
MATT BLACK

TECHNICAL SPECIFICATIONS

Minimum pressure requirements	1 Bar
Maximum pressure requirements	5 Bar
Flow rates @ 3 bar	Adjustable head: 10.6 l/m Fixed head: 11.5 l/m
Inlet fitting connections	3/4" Threaded
Rear inlet supply positions	150mm centres
Outlet connections	1/2" Thread
Valve inlet centres	150mm centres
Supply temperature	Max 65°C
Water system	High Pressure
Features	Separate temperature control with override button for extra safety
	Brass "Safe Touch" body
	Flow control with integral diverter to switch between shower heads
	Includes Easy fit wall brackets
	Soft rub nozzles for easy cleaning
	3 spray patterns, easy click spray control
	Adjustable telescopic shower column 845mm - 1050mm
	200mm fixed drencher head, 110mm adjustable head
	1.5m matt black smooth hose
Colour	Matt Black
Guarantee period	5 years