

TY2 CSHXDIV C

TRINITY Shower Range Trinity Exposed Concentric Chrome Shower Valve with Diverter and Rigid Riser Kit



Features:

- 15mm inlet connections
- Easy replacement with adjustable inlets so you can use on existing pipework centres between 136mm and 158mm
- Thermostatic cartridge with preset temperature stop at 42°C
- Supplied with 2 x 8L/min flow regulators
- Traditional shower kit with external diverter, shower rose, rigid riser, hose, handset, soap basket and cradle

Product Certifications:




For more products, visit our website:
<http://www.bristan.com>



Specification

Finish/Colour:	Chrome
Main Construction Material:	Brass
No of Controls:	2
Shower Type:	Exposed Thermostatic Shower
Shower Head Type:	Shower Rose and Handset
Valve/Cartridge Type:	Thermostatic Cartridge
Maximum Hot Water Supply Temperature °C:	65
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	All - Ideally Balanced
Working Pressure Range:	Min. 0.2 Bar, Max. 5.0 Bar
Connection Inlet:	15mm Compression
Connection Outlet:	15mm Compression
Isolation Valve Included:	No
Check Valve Included:	Yes

Dimensions (measurements in mm)

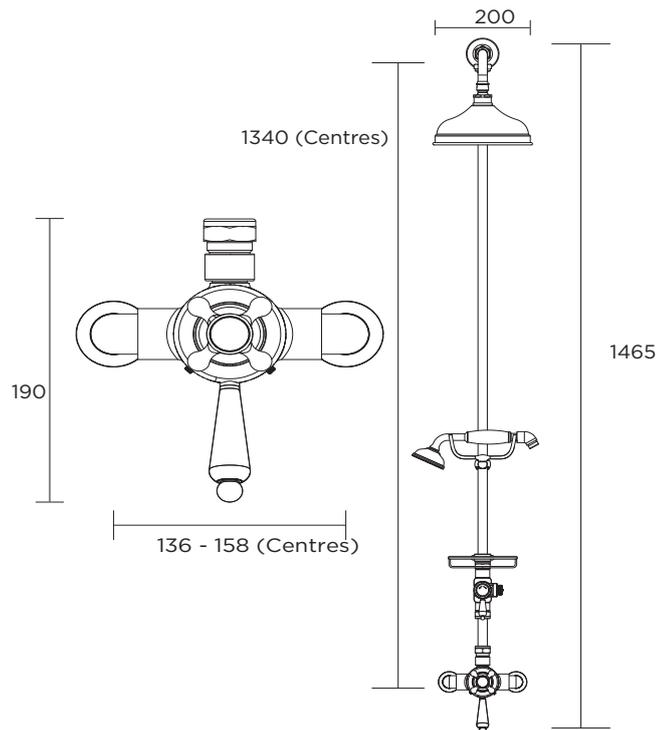

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Through Handset (mixed)	3	5.9	8	12.2	14.3	12.7

TECHNICAL DATA SHEET



BRISTAN

TAPS & SHOWERS

D3